



REMOVE BACK SHELL AND COUPLER FROM PLUG. SLIDE CABLE CLAMP, BUSHING, BACK SHELL, AND COUPLER OVER WIRES. STRIP EACH CONDUCTOR TO "A" DIMENSION, SEE TABLE BELOW.

RECEPTACLE WIRE SIZE | CONTACT "A" PIN DIAMFTER AWG SI7F .062 [1.57] .250 [6.35] 16-20 16 .094 [2.39] 12 .312 [7.92] 12-14 8 .625 [15.88] .142 [3.61] 8-10

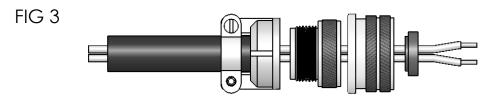

REMOVE RETAINING RING FROM FRONT SHELL. DISASSEMBLE INSERTS AND CONTACTS FROM FRONT SHELL. SLIDE WIRES THROUGH BACK INSERT. (LETTERS ON INSERT FACING TOWARDS CABLE CLAMP) 60-40 TIN LEAD SOLDER EACH CONDUCTOR.

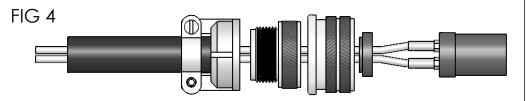


INSERT WIRES INTO CONTACTS AND SOLDER IN PLACE. INSERT CONTACTS INTO FRONT INSERT. ALIGNMENT SLOTS AND LETTERS ON FRONT AND BACK INSERTS SHOULD BE IN LINE.

## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOULD SEALING TECHNOLOGY, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

REV.	APP'D	DATE	SCALE 2:3	DIMENSIONS IN INCHES [mm]
В	JS	01/24/2011	NS14249-11	

## THIRD ANGLE PROJECTION



INSTRUCTION SHEET 5015 PLUG ASSEMBLY

DRAWN	JS	10/30/2008	NUMBER:
ENG APPR.	OG	04/22/2009	

NS14249

REV:

В



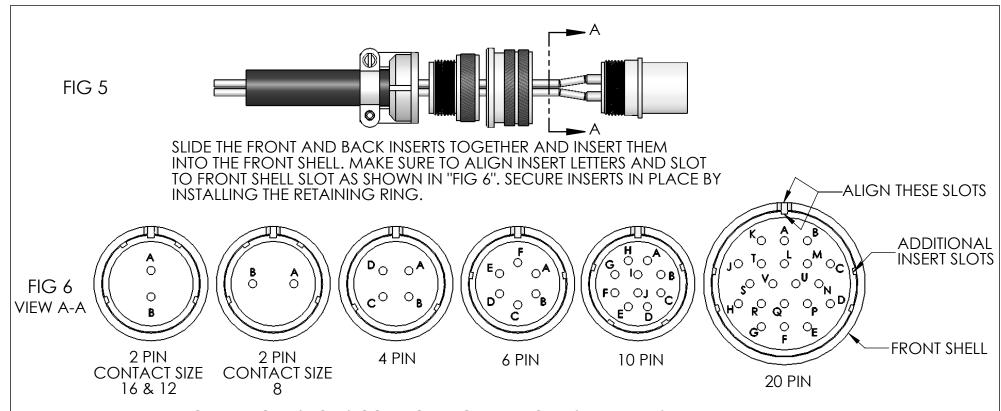


FIGURE ABOVE SHOWS CORRECT ALIGNMENT OF INSERT LETTERS AND SLOT TO FRONT SHELL SLOT.




SLIDE COUPLER OVER FRONT SHELL. THREAD BACK SHELL ONTO FRONT SHELL AND TIGHTEN. THREAD CABLE CLAMP ONTO THE BACK SHELL AND TIGHTEN. MODERATELY TIGHTEN CABLE CLAMP SCREWS TO PROVIDE ADEQUATE STRAIN RELIEF TO WIRES AND CONTACTS.

## PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOULD SEALING TECHNOLOGY, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

REV.	APP'D	DATE	SCALE 2:3	DIMENSIONS IN INCHES [mm]
В	JS	01/24/2011	NS14249-15	

## THIRD ANGLE PROJECTION



INSTRUCTION SHEET 5015 PLUG ASSEMBLY

IN	DRAWN	JS	10/30/2008
n]	ENG APPR.	OG	04/22/2009

NUMBER: NS14249

REV: B

