
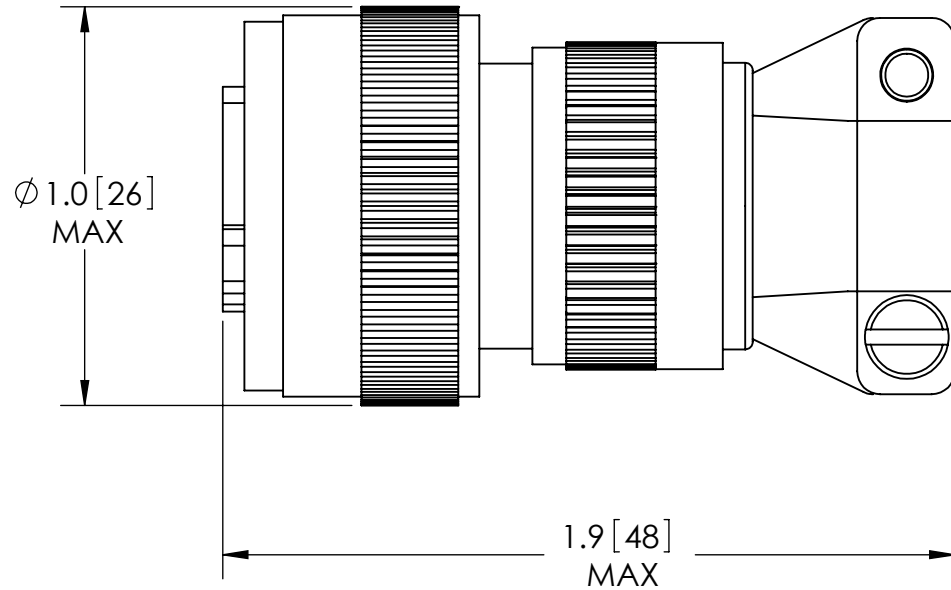


GOLD PLATED  
CRIMP CONTACTS

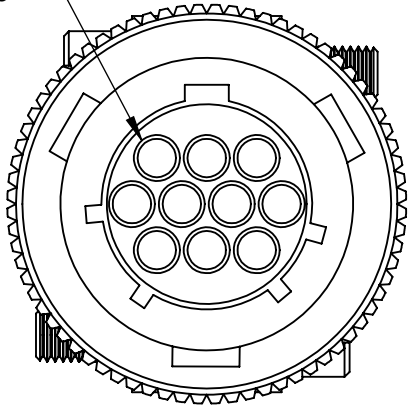


RATINGS

|              |                |
|--------------|----------------|
| VOLTAGE:     | 1 KV DC        |
| CURRENT:     | 5 AMPS         |
| TEMPERATURE: | -55°C TO 200°C |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

10 PIN AIR SIDE PLUG

WWW.SOLIDSEALING.COM



SOLID SEALING TECHNOLOGY, INC.

|      |       |            |             |                           |           |    |            |
|------|-------|------------|-------------|---------------------------|-----------|----|------------|
| REV. | APP'D | DATE       | SCALE 2:1   | DIMENSIONS IN INCHES [mm] | DRAWN     | JS | 10/5/2007  |
| A2   | JS    | 12/02/2010 | MSMM0021-11 |                           | ENG APPR. | MH | 06/05/2008 |

PART NO. KT14378 REV. A

SALES DWG NO. KT14378SL REV. A2

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**