




62 Pin High Density Vacuum Connector

NEW

from Solid Sealing Technology

www.solidsealing.com

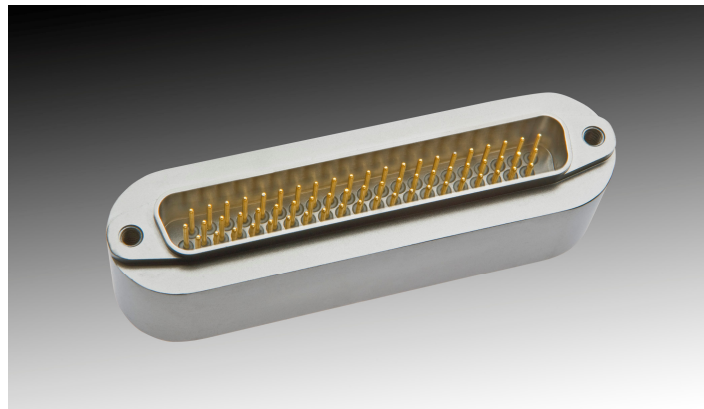

SST Part No.	No. Of Pins	Voltage	Current	Installation
FA16640	62	500 V	2 Amp	Weldable (*)

Other Information:

Conductors: .030 inch or [.7mm] Gold Plated Stn. Stl.

Shell: Stainless Steel

Dielectric: Glass Ceramic

Leak Rate: <1 x 10⁻¹⁰ cc/sec He

Temperature: 450 degrees C Bakeout

Connections: Airside and Vacuum side plugs available

Seal Technology: Glass Ceramic

(*) **Installation** – shown weldable. Can also be supplied in an industry standard Conflat or Iso flange, fitting, or custom plate configuration.

Solid Sealing Technology, Inc
44 Dalliba Ave, Watervliet, N.Y. 12189
Phone: 518-266-6017 • Fax: 518-266-6013