



2.738±.002 [69.55±0.05]

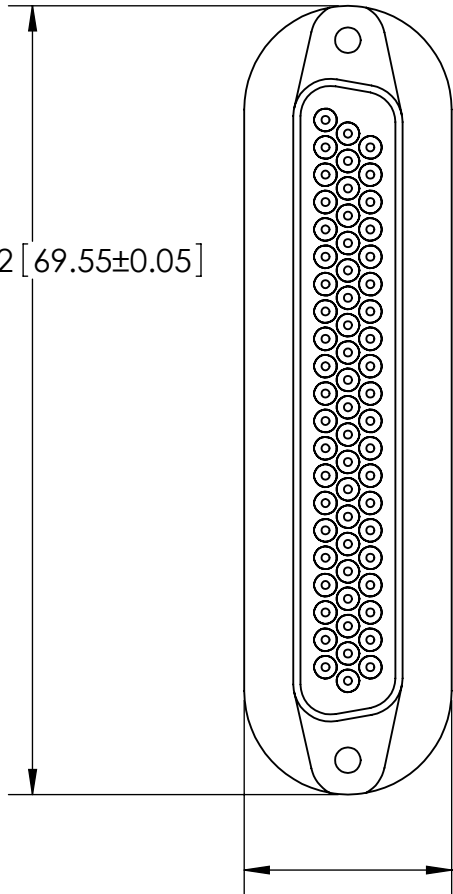

.720±.002 [18.29±0.05]

Ø.03 [0.7]  
GOLD PLATED  
STN STL  
CONDUCTORS

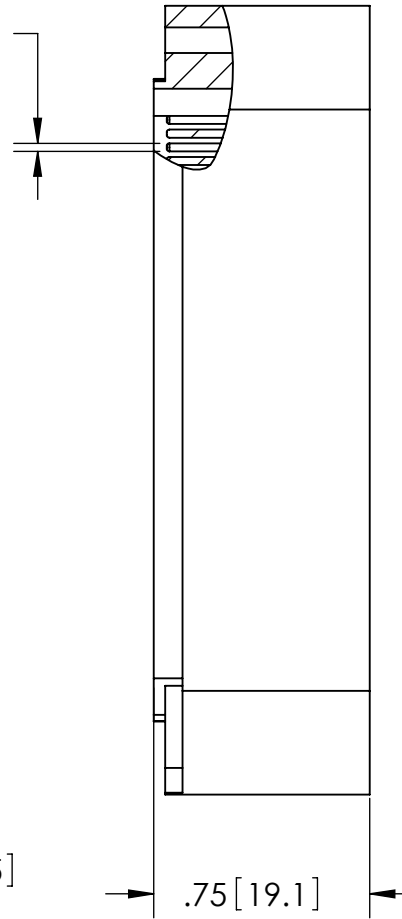

.75 [19.1]


PLUGS SOLD SEPARATELY:  
- VACUUM SIDE PEEK PLUG FA17947  
- AIR SIDE PLUG KT18035

| RATINGS     |                 |
|-------------|-----------------|
| VOLTAGE     | 500V DC         |
| CURRENT     | 2 AMPS          |
| TEMPERATURE | -269°C TO 450°C |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

62 PIN CONNECTOR



SOLID SEALING TECHNOLOGY, INC.

| REV. | APP'D | DATE       | SCALE 1.5:1 | DIMENSIONS IN INCHES [mm] | DRAWN     | MH | 03/16/2008 |
|------|-------|------------|-------------|---------------------------|-----------|----|------------|
| A1   | MH    | 04/15/2008 | MPCL0152-11 |                           | ENG APPR. | MH | 04/15/2008 |

PART NO. FA16640 REV. A

SALES DWG NO. FA16640SL REV. A1