
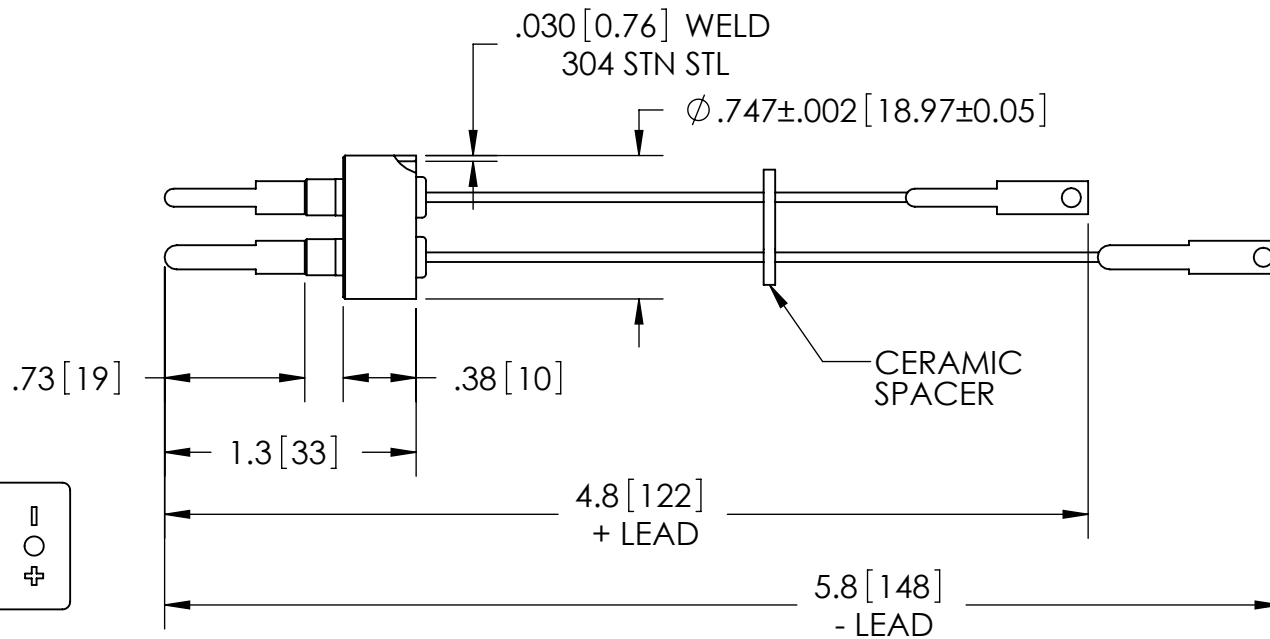


GLASS FILLED
NYLON PLUG
INCLUDED




PART NO.	CONDUCTOR MATERIAL	T/C TYPE
FA11208	CHROMEL / ALUMEL	K
FA11208-02	IRON / CONSTANTAN	J
FA11208-03	TUNGSTEN / RHENIUM*	C
FA11208-04	CHROMEL / CONSTANTAN	E

*TYPE C USES COMPENSATING WIRE
MAXIMUM JUNCTION TEMPERATURE 250°C

RATINGS	
CONDUCTOR MATERIAL:	SEE TABLE AT LEFT
T/C TYPE:	SEE TABLE AT LEFT
PRESSURE:	1250 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-29°C TO 218°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE
ONE PAIR T/C SPADE TYPE



REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	1/12/2006
B1	JF	06/08/2020	MPC10001-ST		ENG APPR.	MH	05/26/2006

PART NO. (SEE TABLE) REV. B

WWW.SOLIDSEALING.COM

SALES DWG NO. FA11208SL REV. B1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.