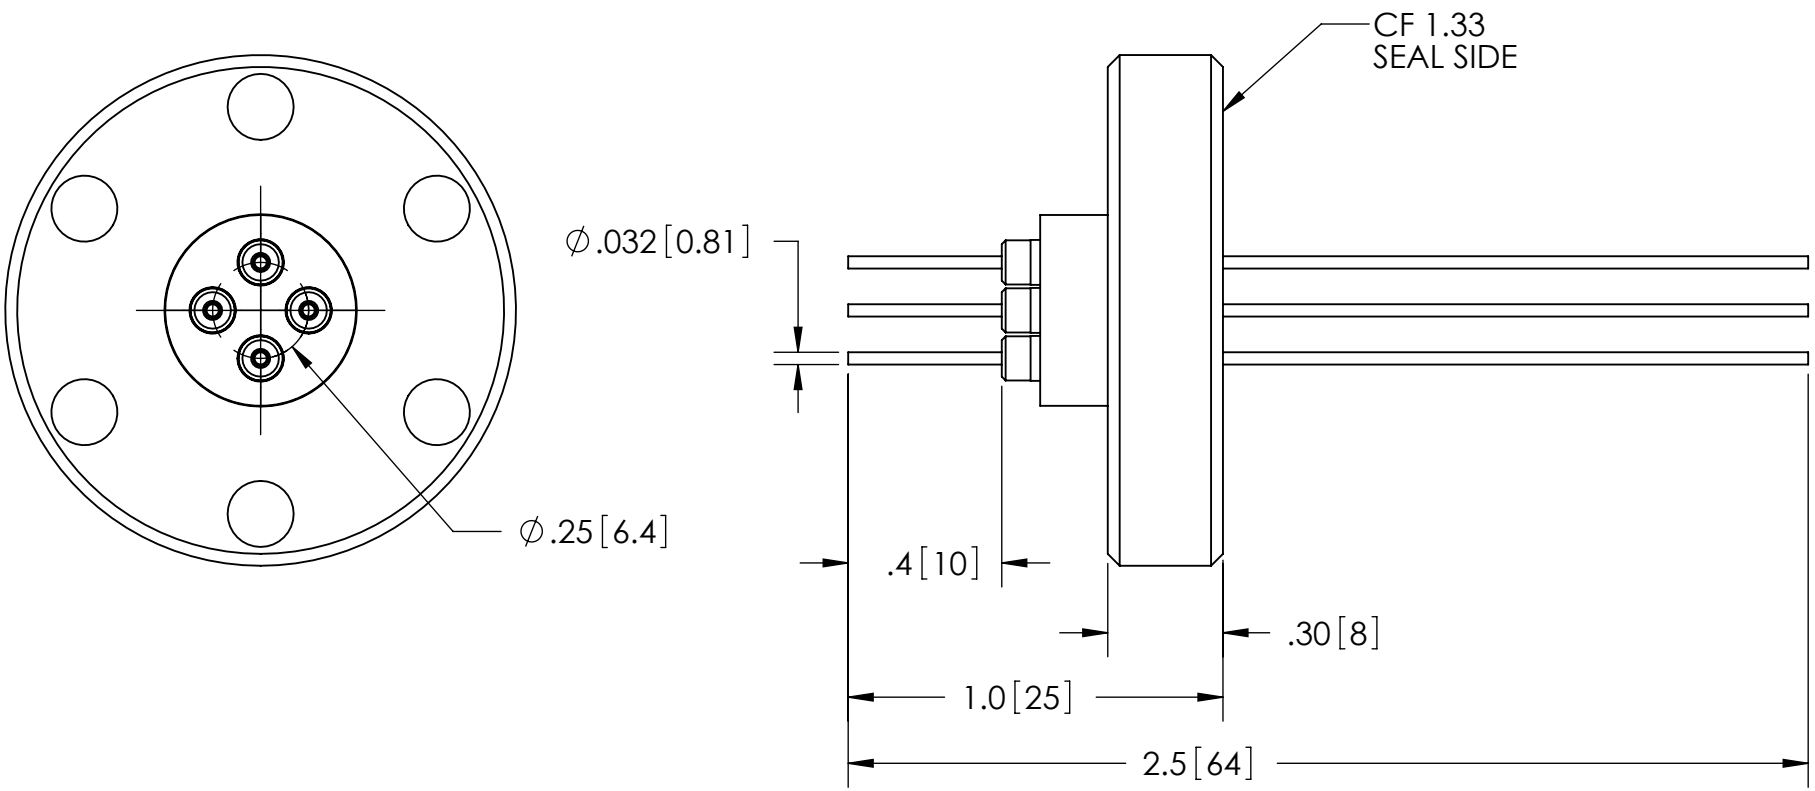

PART NO.	CONDUCTOR MATERIAL	CURRENT
FA11640	COPPER	16 AMPS
FA11640-02	MOLYBDENUM	8.5 AMPS
FA11640-03	NICKEL	5 AMPS
FA11640-04	304 STN STL	1.1 AMPS

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	2 KV DC
CURRENT:	SEE TABLE AT LEFT
PRESSURE:	1400 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

TITLE

FOUR 2KV FEEDTHROUGHS

SOLID SEALING TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	1/12/2006
B1	JF	08/21/2026	MPDC0007-0ST		ENG APPR.	MH	03/21/2006

PART NO. (SEE TABLE) REV. B

WWW.SOLIDSEALING.COM

SALES DWG NO. FA11640SL REV. B1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.