


PART NO.	CONDUCTOR MATERIAL	CURRENT	AIR SIDE PLUG
FA12655	NICKEL	16 AMPS	NO
KT12655	NICKEL	16 AMPS	YES
FA12655-02	MOLYBDENUM	23 AMPS	NO
KT12655-02	MOLYBDENUM	23 AMPS	YES

RATINGS	
CONDUCTOR MATERIAL:	SEE TABLE AT LEFT
VOLTAGE:	700V DC
CURRENT:	SEE TABLE AT LEFT
PRESSURE:	475 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-55°C TO 125°C

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 			TITLE: <b>FOUR PIN CONNECTOR</b>		<a href="http://WWW.SOLIDSEALING.COM">WWW.SOLIDSEALING.COM</a> 		
REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	5/3/2006	PART NO. (SEE TABLE) REV. A		<b>SOLID SEALING TECHNOLOGY, INC.</b>	
A2	JS	11/26/2012	MPDP0020-0ST		ENG APPR.	MH	08/14/2006			SALES DWG NO. FA12655SL REV. A2	


**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**

# 16-20 AWG WIRE SIZE




4 PIN  
FEEDTHROUGH,  
ALUMEL CONDUCTORS:  
FA10658\*

WITH AIR SIDE PLUG:  
KT10658




6 PIN  
FEEDTHROUGH,  
ALUMEL CONDUCTORS:  
FA10657\*

WITH AIR SIDE PLUG:  
KT10657

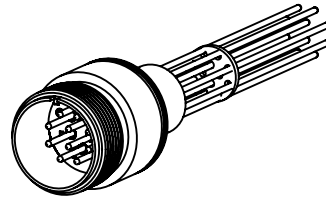


10 PIN  
FEEDTHROUGH,  
ALUMEL CONDUCTORS:  
FA10656\*

WITH AIR SIDE PLUG:  
KT10656

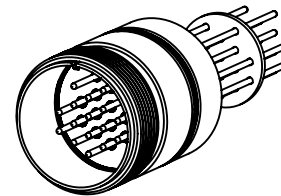


16 PIN  
FEEDTHROUGH,  
ALUMEL CONDUCTORS:  
FA19550

WITH AIR SIDE PLUG:  
KT19550

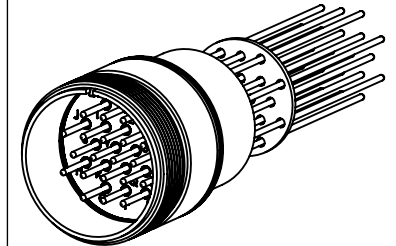


20 PIN  
FEEDTHROUGH,  
ALUMEL CONDUCTORS:  
FA19417\*


WITH AIR SIDE PLUG:  
KT19417

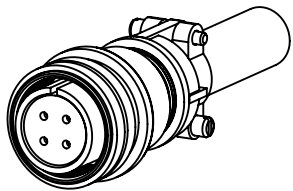


4 PIN  
AIR SIDE PLUG  
KT11600\*

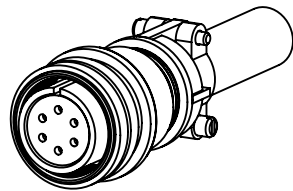


6 PIN  
AIR SIDE PLUG  
KT13803\*

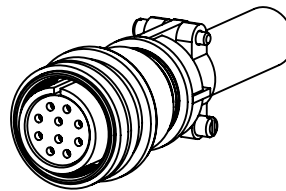

10 PIN  
AIR SIDE PLUG  
KT13108\*

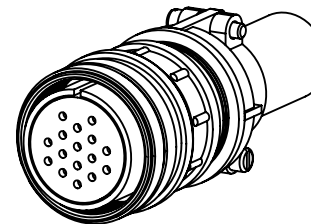

16 PIN  
AIR SIDE PLUG  
KT26175

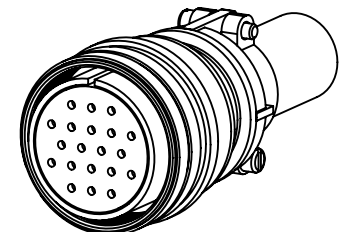


20 PIN  
AIR SIDE PLUG  
KT21522\*

\*THERMOCOUPLE TYPE K  
OPTION AVAILABLE

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

5015 SERIES FAMILY



**SOLID SEALING**  
TECHNOLOGY

REV.	APP'D	DATE	SCALE 1:2	DIMENSIONS IN INCHES [mm]	DRAWN	CW	8/20/2021
A1	CW	1/24/2022	MPDP0003-01	ENG APPR.	JF	1/24/2022	


REV. A1

WWW.SOLIDSEALING.COM

SALES DWG NO. 5015\_SERIES REV. A1

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**

# 12-14 AWG WIRE SIZE




2 PIN  
FEEDTHROUGH,  
NICKEL CONDUCTORS:  
FA12654


WITH AIR SIDE PLUG:  
KT12654

2 PIN  
FEEDTHROUGH,  
MOLYBDENUM  
CONDUCTORS:  
FA12654-02

WITH AIR SIDE PLUG:  
KT12654-02

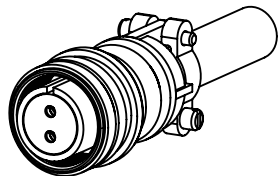

2 PIN  
AIR SIDE PLUG  
KT14249

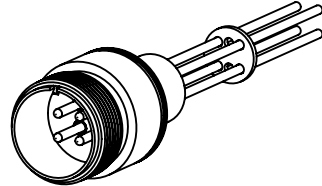


4 PIN  
FEEDTHROUGH,  
NICKEL CONDUCTORS:  
FA12655

WITH AIR SIDE PLUG:  
KT12655


4 PIN  
FEEDTHROUGH,  
MOLYBDENUM  
CONDUCTORS:  
FA12655-02

WITH AIR SIDE PLUG:  
KT12655-02

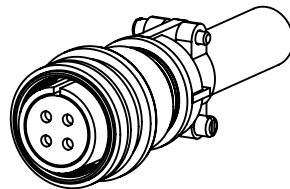

4 PIN  
AIR SIDE PLUG  
KT14145

# 8-10 AWG WIRE SIZE

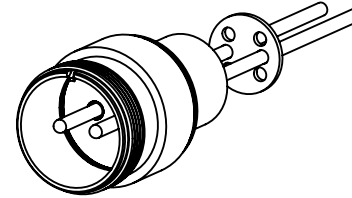


2 PIN  
FEEDTHROUGH,  
NICKEL CONDUCTORS:  
FA20847


WITH AIR SIDE PLUG:  
KT20847

2 PIN  
FEEDTHROUGH,  
MOLYBDENUM  
CONDUCTORS:  
FA20847-02

WITH AIR SIDE PLUG:  
KT20847-02

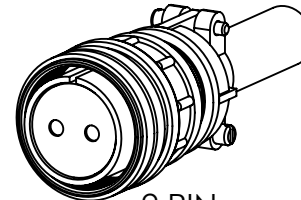

2 PIN  
AIR SIDE PLUG  
KT24963

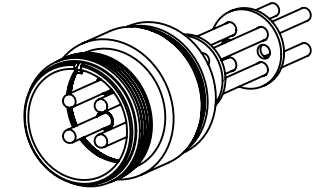


4 PIN  
FEEDTHROUGH,  
NICKEL CONDUCTORS:  
FA16259

WITH AIR SIDE PLUG:  
KT16259

4 PIN  
FEEDTHROUGH,  
MOLYBDENUM  
CONDUCTORS:  
FA16259-02

WITH AIR SIDE PLUG:  
KT16259-02

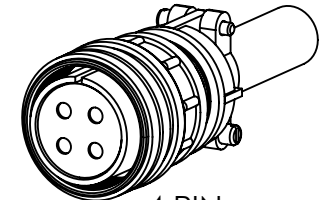


4 PIN  
AIR SIDE PLUG  
KT19710

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

5015 SERIES FAMILY



REV.	APP'D	DATE	SCALE 1:2	DIMENSIONS IN INCHES [mm]	DRAWN	CW	8/20/2021
A1	CW	1/24/2022	KT14249-11		ENG APPR.	JF	1/24/2022

REV. A1

WWW.SOLIDSEALING.COM

SALES DWG NO. 5015\_SERIES REV. A1

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**