


Ø.95 [24.1]

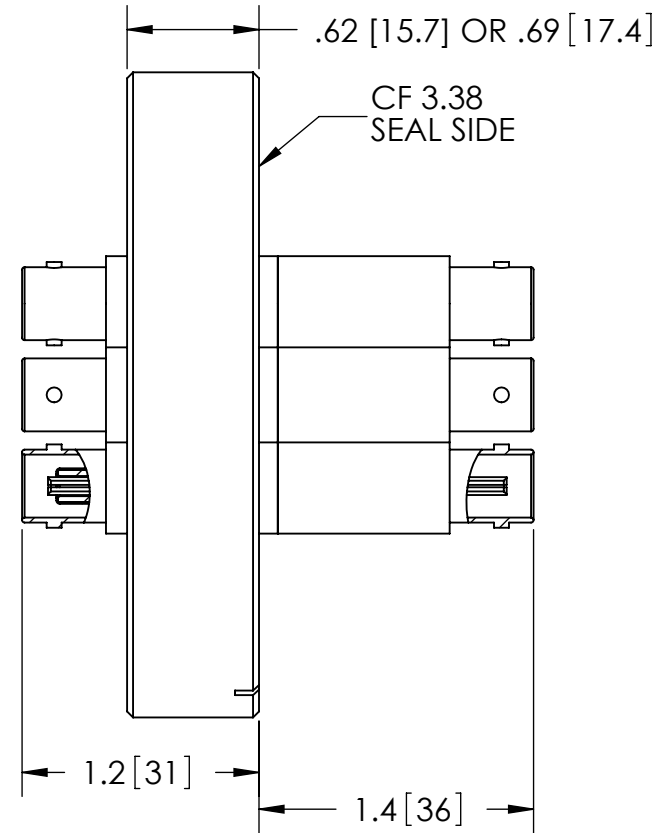

PART NO.	AIR SIDE PLUG
FA13025	NO
KT13025	YES

RATINGS	
VOLTAGE:	500V DC
CURRENT:	3.6 AMPS
PRESSURE:	1400 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-65°C TO 165°C

[WWW.SOLIDSEALING.COM](http://WWW.SOLIDSEALING.COM)




**SOLID SEALING TECHNOLOGY, INC.**

SALES DWG NO. FA13025SL REV. D2

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

FOUR DOUBLE ENDED BNCS

PART NO. FA13025 REV. D

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	12/28/2005
D2	JS	10/15/2012	COBN0022-01		ENG APPR.	MH	05/15/2006