




Ø.04 [1.0]
GOLD PLATED
STN STL
CONDUCTORS

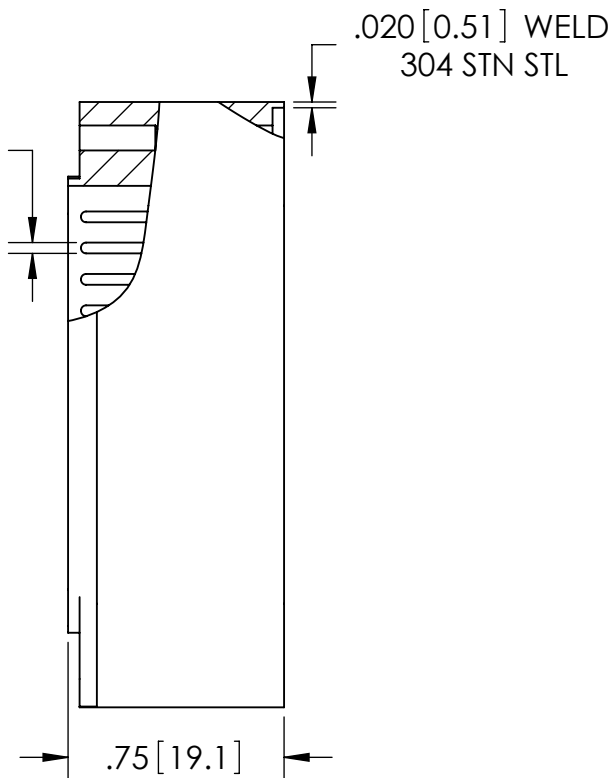

PLUGS SOLD SEPARATELY:
-VACUUM SIDE PEEK PLUG FA13605
-AIR SIDE PLUG KT14878

RATINGS	
VOLTAGE:	500V DC
CURRENT:	3 AMPS
PRESSURE:	1200 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

WWW.SOLIDSEALING.COM

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.</p>					<p>THIRD ANGLE PROJECTION</p> 			<p>TITLE:</p> <p>25 PIN SUB D CONNECTOR</p>		 <p>SOLID SEALING TECHNOLOGY, INC.</p>	
REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JM	2/22/2006	PART NO. FA13121 REV. C			SALES DWG NO. FA13121SL REV. C3
C3	JS	11/21/2012	MPCL0057-01		ENG APPR.	MH	08/25/2006				

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.