


.832±.002 [21.13±0.05]

Ø.04 [1.0]
GOLD PLATED
STN STL
CONDUCTORS

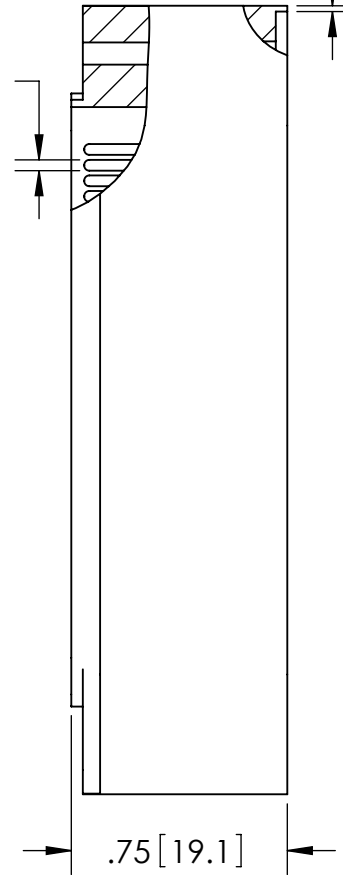

.020 [0.51] WELD
304 STN STL

.75 [19.1]

PLUGS SOLD SEPARATELY:
-VACUUM SIDE PEEK PLUG FA13606
-AIR SIDE PLUG KT14879

RATINGS	
VOLTAGE:	500V DC
CURRENT:	3 AMPS
PRESSURE:	900 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA13122SL REV. B3

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

50 PIN SUB D CONNECTOR

PART NO. FA13122 REV. B

REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JM	2/22/2006
B3	JS	11/21/2012	MPCL0061-01		ENG APPR.	MH	08/25/2006

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.