


Ø.04 [1.0]
GOLD PLATED
STN STL
CONDUCTORS

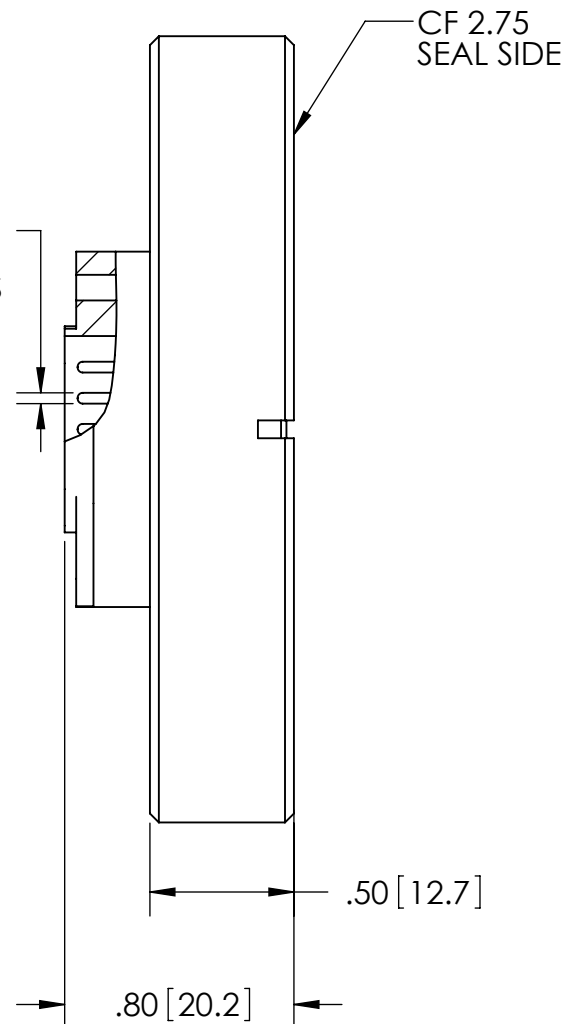

PLUGS SOLD SEPARATELY:
-VACUUM SIDE PEEK PLUG FA13603
-AIR SIDE PLUG KT14876

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	500V DC
CURRENT:	5 AMPS
PRESSURE:	1350 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE 9 PIN SUB D CONNECTOR			
REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JM	2/22/2006	PART NO. FA13288 REV. B	WWW.SOLIDSEALING.COM
B1	CW	4/7/2022	MPCL0093-01		ENG APPR.	MH	08/25/2006		SALES DWG NO. FA13288SL REV. B1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.