


PART NO.	AIR SIDE PLUG
FA14369	NO
KT14369	YES

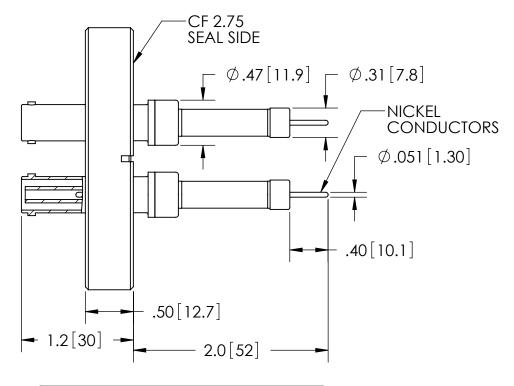


RATINGS			
VOLTAGE:	10KV DC		
CURRENT:	8.2 AMPS		
PRESSURE:	120 PSIG @ 20°C		
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C		
TEMPERATURE WITH PLUG:	-55°C TO 85°C		

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN
A2	JS	10/22/2012	COS10016-11	INCHES [mm]

THIRD ANGLE PROJECTION



IN	DRAWN	JS	3/10/2009	
1]	ENG APPR.	MH	06/12/2009	

TITLE:

TWO 10KV EXPOSED SHVS

PART NO. FA14369 REV. A

WWW.SOLIDSEALING.COM



SALES DWG NO. FA14369SL REV. A2