



| RATINGS | |
|--------------|-------------------|
| VOLTAGE: | 600V AC / 850V DC |
| CURRENT: | 9 AMPS |
| TEMPERATURE: | -55°C TO 200°C |

WIRE IS AVAILABLE IN ANY LENGTH, PART NUMBER SUFFIX INDICATES LENGTH IN INCHES.


EXAMPLE: FA15065-055 IS A 55 INCH LONG WIRE.

WWW.SOLIDSEALING.COM


| | | | | | | | | | | | |
|---|-------|------------|-------------|---------------------------|---|----|------------|--|--|--|--|
| <p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.</p> | | | | | <p>THIRD ANGLE PROJECTION</p>  | | | <p>TITLE:</p> <p>KAPTON INSULATED WIRE</p> | |  <p>SOLID SEALING TECHNOLOGY, INC.</p> | |
| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | JS | 5/15/2008 | PART NO. FA15065 REV. A | | SALES DWG NO. FA15065SL REV. A2 | |
| A2 | JS | 06/15/2011 | AHDWR006-11 | | ENG APPR. | MH | 07/11/2008 | | | | |

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


3 PINS




SINGLE ENDED
FEEDTHROUGH:
FA16820



DOUBLE ENDED
FEEDTHROUGH:
FA16822




AIR SIDE PLUG (CRIMP): KT18063
AIR SIDE PLUG (SOLDER): FP18062




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA18064


6 PINS




SINGLE ENDED
FEEDTHROUGH:
FA16808



DOUBLE ENDED
FEEDTHROUGH:
FA16809*




AIR SIDE PLUG (CRIMP): KT18065*
AIR SIDE PLUG (SOLDER): FP18066




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA18067*

*THERMOCOUPLE TYPE K
OPTION AVAILABLE


10 PINS




SINGLE ENDED
FEEDTHROUGH:
FA13003



DOUBLE ENDED
FEEDTHROUGH:
FA12933*



AIR SIDE PLUG (CRIMP): KT14378*
AIR SIDE PLUG (SOLDER): FP14900




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA13461*

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE
PROJECTION



TITLE

26482 SERIES FAMILY



SOLID SEALING
TECHNOLOGY

| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | CW | 8/19/2021 |
|------|-------|------------|-------------|------------------------------|-------|-----------|-----------|
| A2 | JF | 01/22/2025 | MPCL0163-11 | ENG APPR. | JF | 1/27/2022 | |


REV: A2

WWW.SOLIDSEALING.COM


SALES DWG NO. 26482_SERIES REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


19 PINS




SINGLE ENDED
FEEDTHROUGH:
FA13002



DOUBLE ENDED
FEEDTHROUGH:
FA12932*

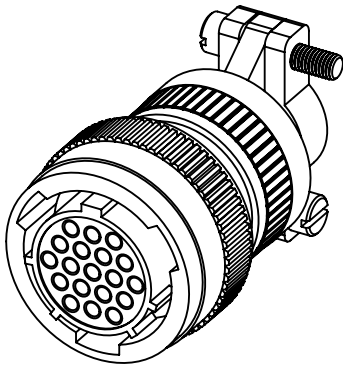


AIR SIDE PLUG (CRIMP): KT14379*
AIR SIDE PLUG (SOLDER): FP14901




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA13462*


32 PINS




SINGLE ENDED
FEEDTHROUGH:
FA13001



DOUBLE ENDED
FEEDTHROUGH:
FA12931*

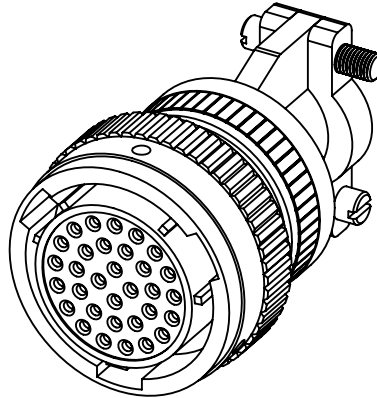


AIR SIDE PLUG (CRIMP): KT14380*
AIR SIDE PLUG (SOLDER): FP14902




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA13463*

*THERMOCOUPLE TYPE K
OPTION AVAILABLE


41 PINS




SINGLE ENDED
FEEDTHROUGH:
FA12998



DOUBLE ENDED
FEEDTHROUGH:
FA12930

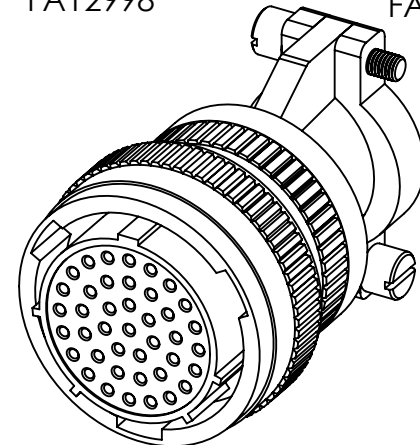

AIR SIDE PLUG (CRIMP): KT14381
AIR SIDE PLUG (SOLDER): FP14903




VACUUM SIDE PLUG
(DOUBLE ENDED ONLY):
FA13464

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE
PROJECTION



TITLE

26482 SERIES FAMILY



SOLID SEALING
TECHNOLOGY

| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | CW | 8/19/2021 |
|------|-------|------------|-------------|------------------------------|-------|-----------|-----------|
| A2 | JF | 01/22/2025 | MPCL0054-02 | ENG APPR. | JF | 1/27/2022 | |


REV: A2

WWW.SOLIDSEALING.COM


SALES DWG NO. 26482_SERIES REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


CONTACTS/WIRE/CRIMP TOOL/LOCATOR




CRIMP CONTACTS
 KT13353 (COPPER ALLOY)
 KT13353-02 (CHROMEL)**
 KT13353-03 (ALUMEL)**
 KT13353-11 (COPPER ALLOY,
 NO COLOR BANDS)

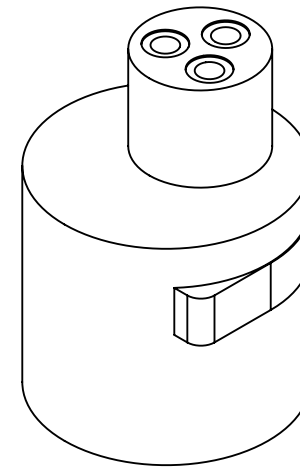

LOCATOR
 FP44441
 (USED WITH FP44440)

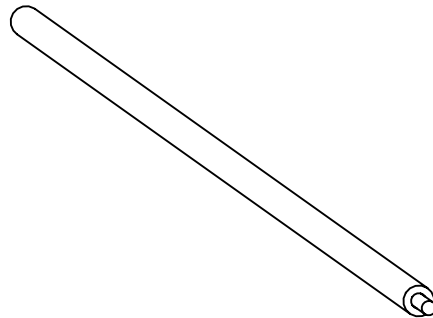


22 AWG WIRE
 KAPTON
 (CUSTOM LENGTHS AVAILABLE)
 FA15065

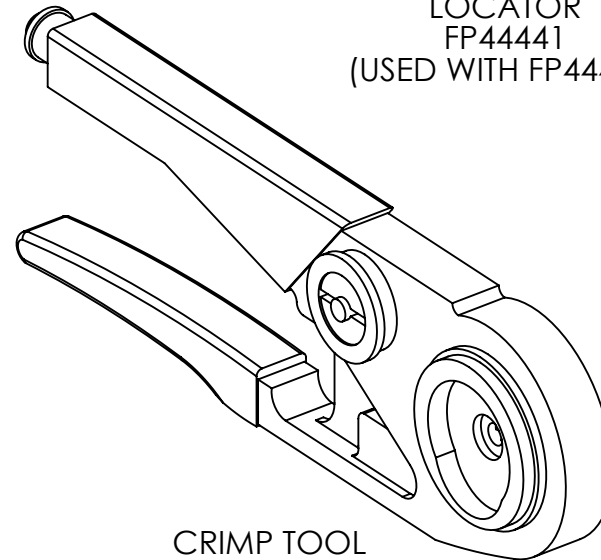

CRIMP TOOL
 FP44440

****THERMOCOUPLE TYPE K CRIMP CONTACTS**

| | | | | | | | | | |
|---|-------|------------|--------------|------------------------------|-----------|----------------------------------|-----------|--|------------------------------------|
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED. | | | | THIRD ANGLE PROJECTION | | TITLE 26482 SERIES FAMILY | |  SOLID SEALING TECHNOLOGY | |
| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | CW | 8/19/2021 | REV: A2 | WWW.SOLIDSEALING.COM |
| A2 | JF | 01/22/2025 | ACDCN010-1ST | | ENG APPR. | JF | 1/27/2022 | | SALES DWG NO. 26482_SERIES REV. A2 |

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.