


CRIMP INSTRUCTIONS:
 1- CRIMP CONTACTS USING TOOL FP13347 (SEE TABLE FOR SETTINGS).

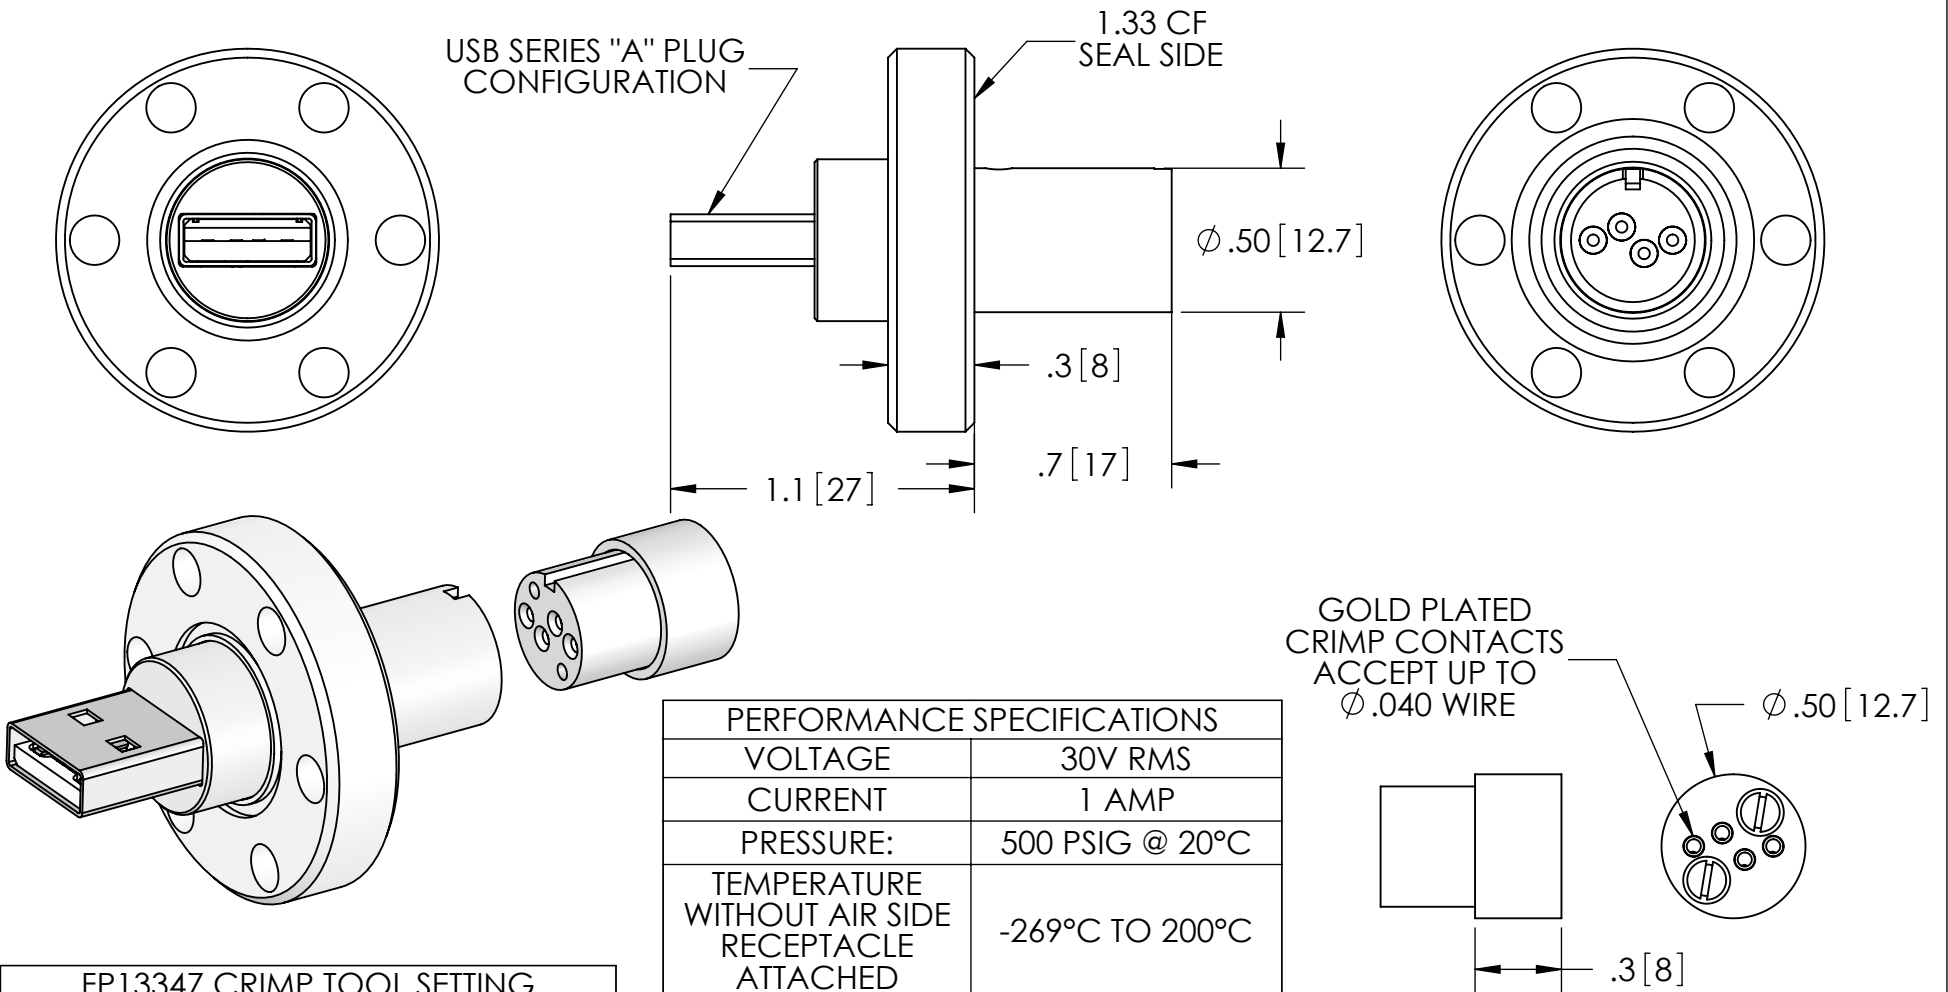

PERFORMANCE SPECIFICATIONS	
VOLTAGE	30V RMS
CURRENT	1 AMP
PRESSURE:	500 PSIG @ 20°C
TEMPERATURE WITHOUT AIR SIDE RECEPTACLE ATTACHED	-269°C TO 200°C

OUR USB CONNECTORS MEET OR EXCEED THE VOLTAGE AND CURRENT REQUIREMENTS FOR USB 2.0 AND 3.0. WE DO NOT GUARANTEE THE DATA TRANSFER RATE OR ANY OTHER REQUIREMENT OF THE USB SPECIFICATIONS.

MATES WITH STANDARD USB SERIES "A" RECEPTACLE ON AIR SIDE

FP13347 CRIMP TOOL SETTING	
WIRE AWG	TOOL SETTING
20	4
22	3
24	2

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE USB CONNECTOR			
REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JS	4/17/2008	PART NO. FA16840 REV. C	WWW.SOLIDSEALING.COM
C3	JF	10/06/2021	MPC10142-12		ENG APPR.	MH	05/18/2009		SALES DWG NO. FA16840SL REV. C3

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.