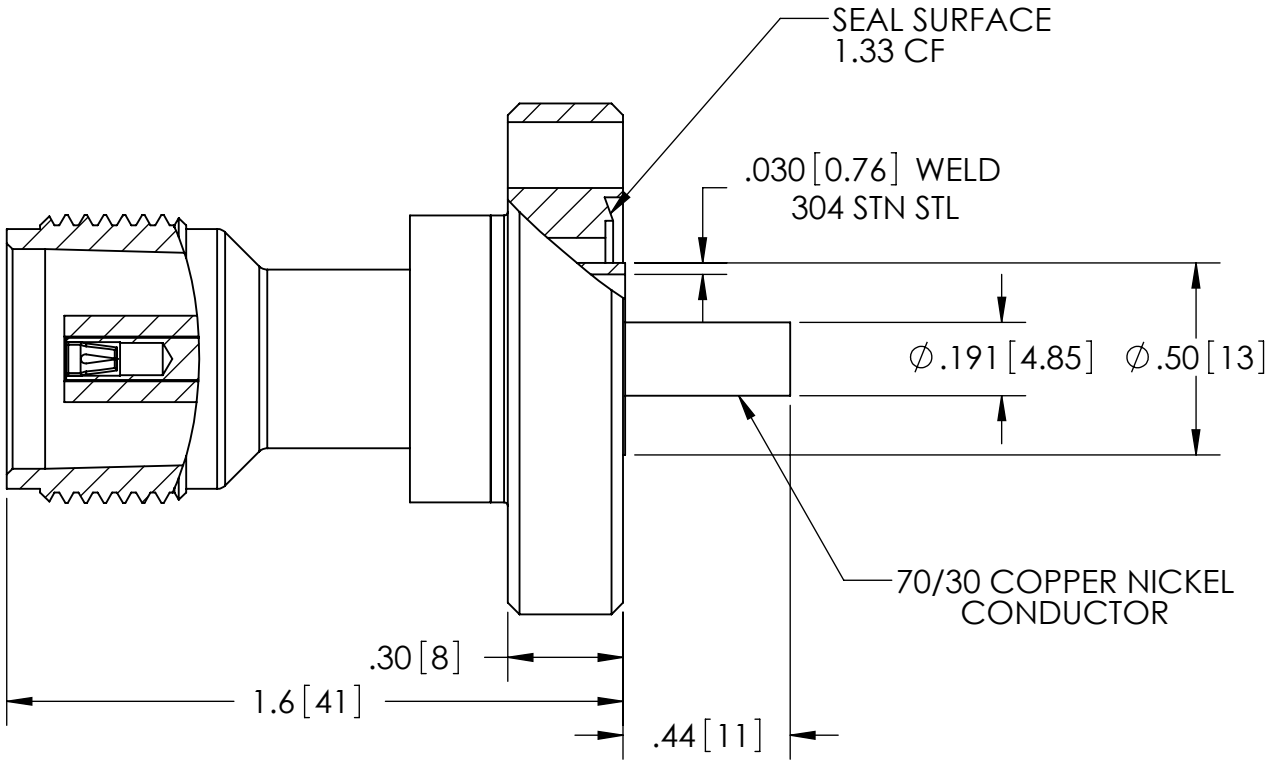

PART NO.	PLUG
FA17849	NO
KT17849	YES

PERFORMANCE SPECIFICATIONS	
VOLTAGE	7KV DC
CURRENT	7 AMPS
PRESSURE:	320 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG	-269°C TO 150°C*
TEMPERATURE WITH PLUG	-55°C TO 150°C

*200°C SHORT TERM 150° CONTINUOUS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

TITLE

HN CONNECTOR

SOLID SEALING TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	11/06/2009
A4	MH	1/20/2021	COHN0003-11		ENG APPR.	MH	11/06/2009

PART NO. FA17849 REV. A

WWW.SOLIDSEALING.COM

SALES DWG NO. FA17849SL REV. A4

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.