


HIGH VOLTAGE POWERPLUG FOR .250 DIA CONDUCTOR

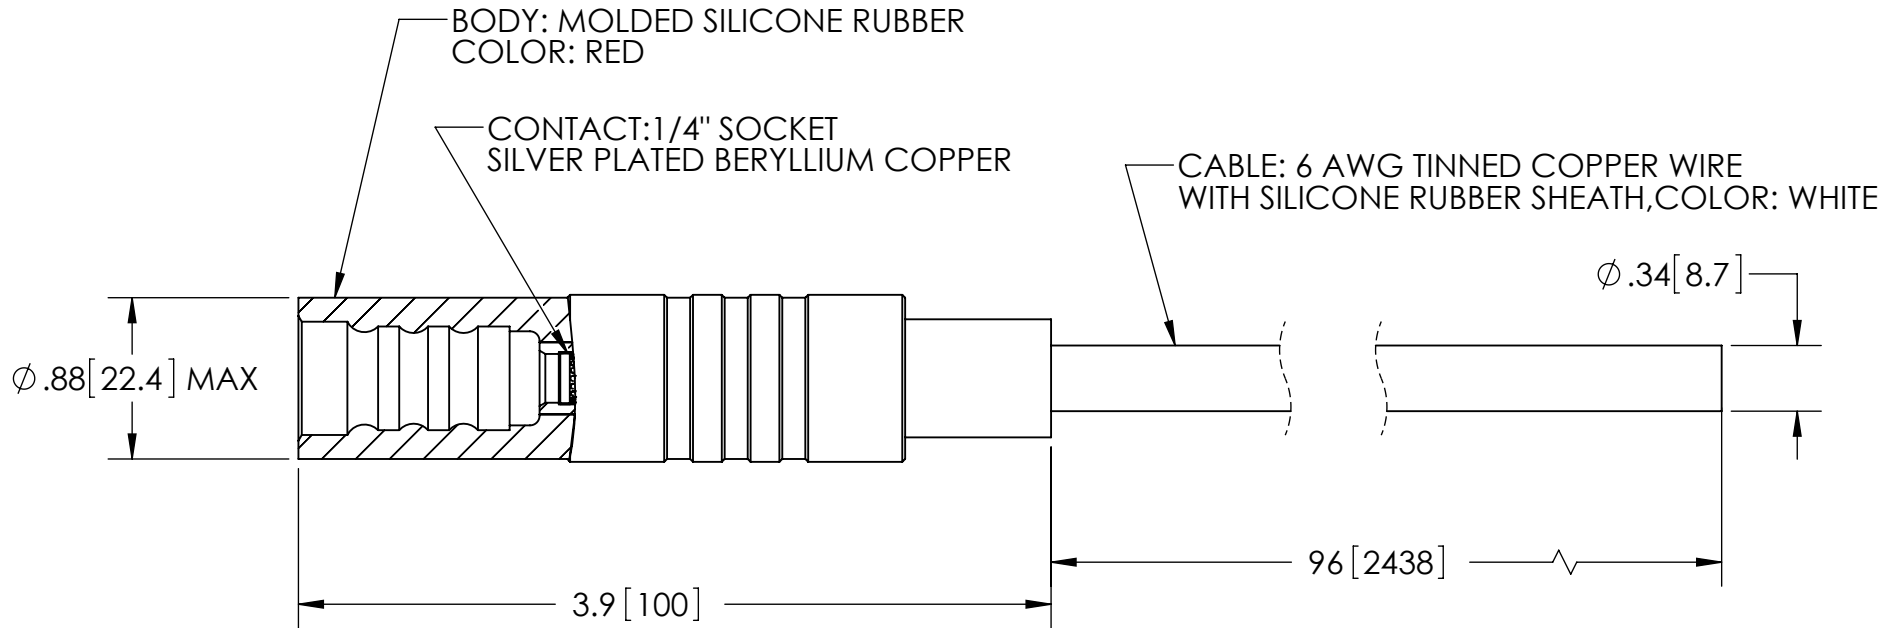

PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	25KV DC
CURRENT:	100 AMPS (30 °C RISE FROM ROOM TEMP)
TEMPERATURE:	-40°C TO 125°C*

*MAX TEMP DOES NOT TAKE IN CONSIDERATION
HEAT RISE DUE TO OPERATING CURRENT

WWW.SOLIDSEALING.COM



SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA18649SL REV. C1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

HIGH VOLTAGE POWERPLUG

PART NO. FA18649 REV. C

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	6/9/2008
C1	JF	01/08/2016	CAME0025-11A		ENG APPR.	JF	01/08/2016

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.