


CF 2.75
ROTATABLE
SEAL SIDE

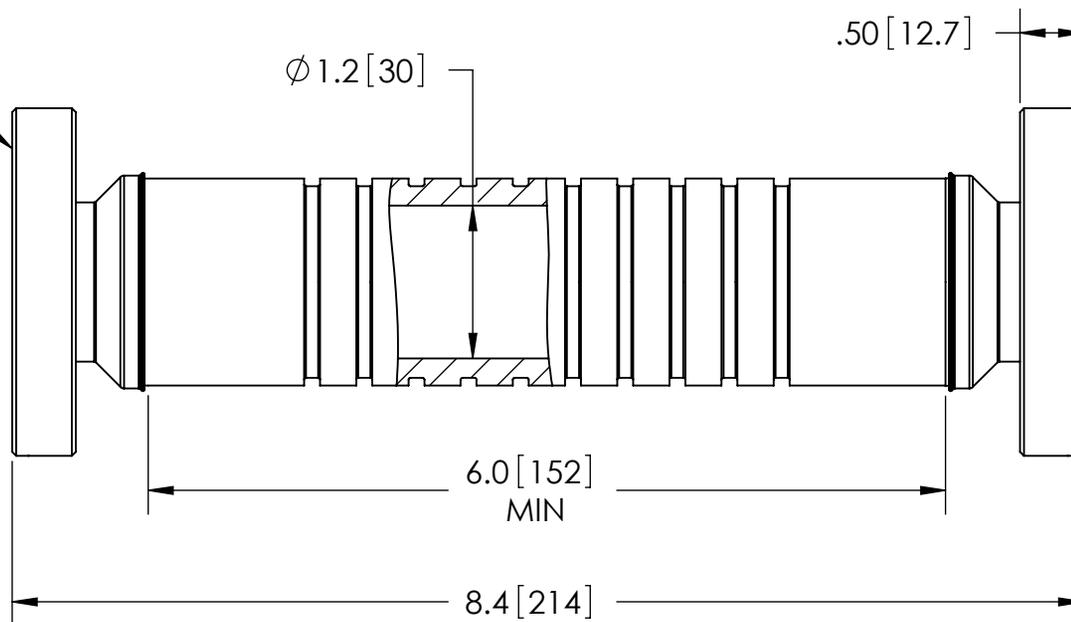

.50 [12.7]

CF 2.75
NON ROTATABLE
SEAL SIDE

$\phi 1.2 [30]$

6.0 [152]
MIN

8.4 [214]

RATINGS

VOLTAGE:	90 KV DC
TEMPERATURE	-55°C TO 450°C

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA18691SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

VACUUM BREAK

PART NO. FA18691 REV. A

REV.	APP'D	DATE	SCALE 1:1.5	DIMENSIONS IN INCHES [mm]	DRAWN	JS	5/22/2008
A1	MH	05/30/2008	BRCL0046-11		ENG APPR.	MH	05/30/2008

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.