


HIGH VOLTAGE POWERPLUG
FOR .154 DIA CONDUCTOR

MATES WITH FEEDTHROUGH FA17599

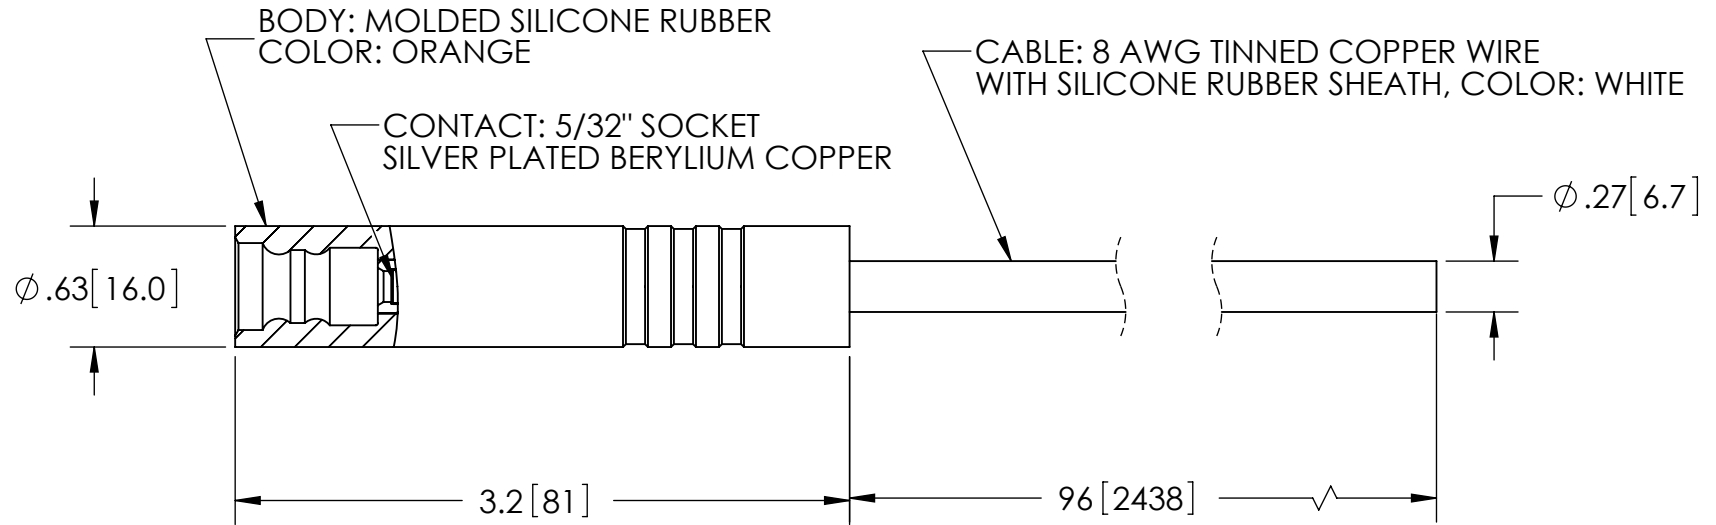

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	10KV DC
CURRENT:	70 AMPS **
TEMPERATURE:	-40°C TO 125°C*

*MAX TEMP DOES NOT TAKE IN CONSIDERATION
HEAT RISE DUE TO OPERATING CURRENT

**SEE DOCUMENT "PRD-1303" UNDER TECHNICAL DATA
FOR INFORMATION ON CURRENT PERFORMANCE

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA18788SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

HIGH VOLTAGE POWERPLUG

PART NO. FA18788 REV. A

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JF	07/27/2016
A1	JF	08/03/2016	CAME0026-13A		ENG APPR.	JF	08/03/2016

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.