
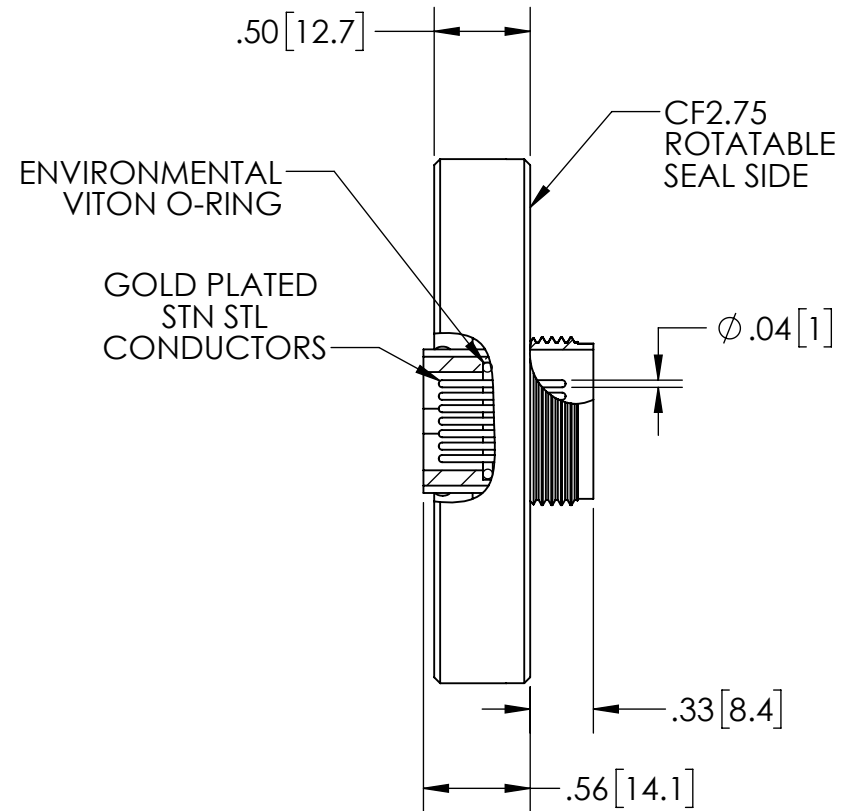


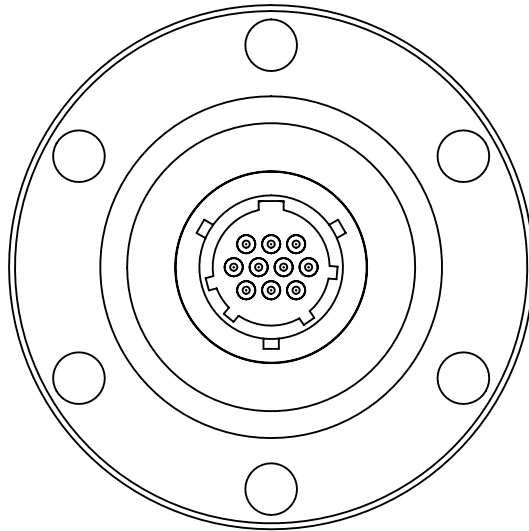

PLUG SOLD SEPERATELY
 -VACUM SIDE PEEK PLUG FA13461
 -AIR SIDE WITH SOLDER CONTACT FP14900
 -AIRE SIDE WITH CRIMP CONTACT KT14378

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	1KV DC
CURRENT:	5 AMPS
PRESSURE:	450 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				 THIRD ANGLE PROJECTION		TITLE 10 PIN CONNECTOR IN 2.75CF ROTATABLE			 SOLID SEALING TECHNOLOGY	
REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	ET	5/29/2018	PART NO. FA22070 REV. C	WWW.SOLIDSEALING.COM	
C1	JF	08/20/2026	MPCL0106-11		ENG APPR.	JF	08/20/2026		SALES DWG NO. FA22070SL REV. C1	

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.