



CRIMP INSTRUCTIONS:
1- CRIMP CONTACTS USING TOOL FP13347 (SEE TABLE FOR SETTINGS).

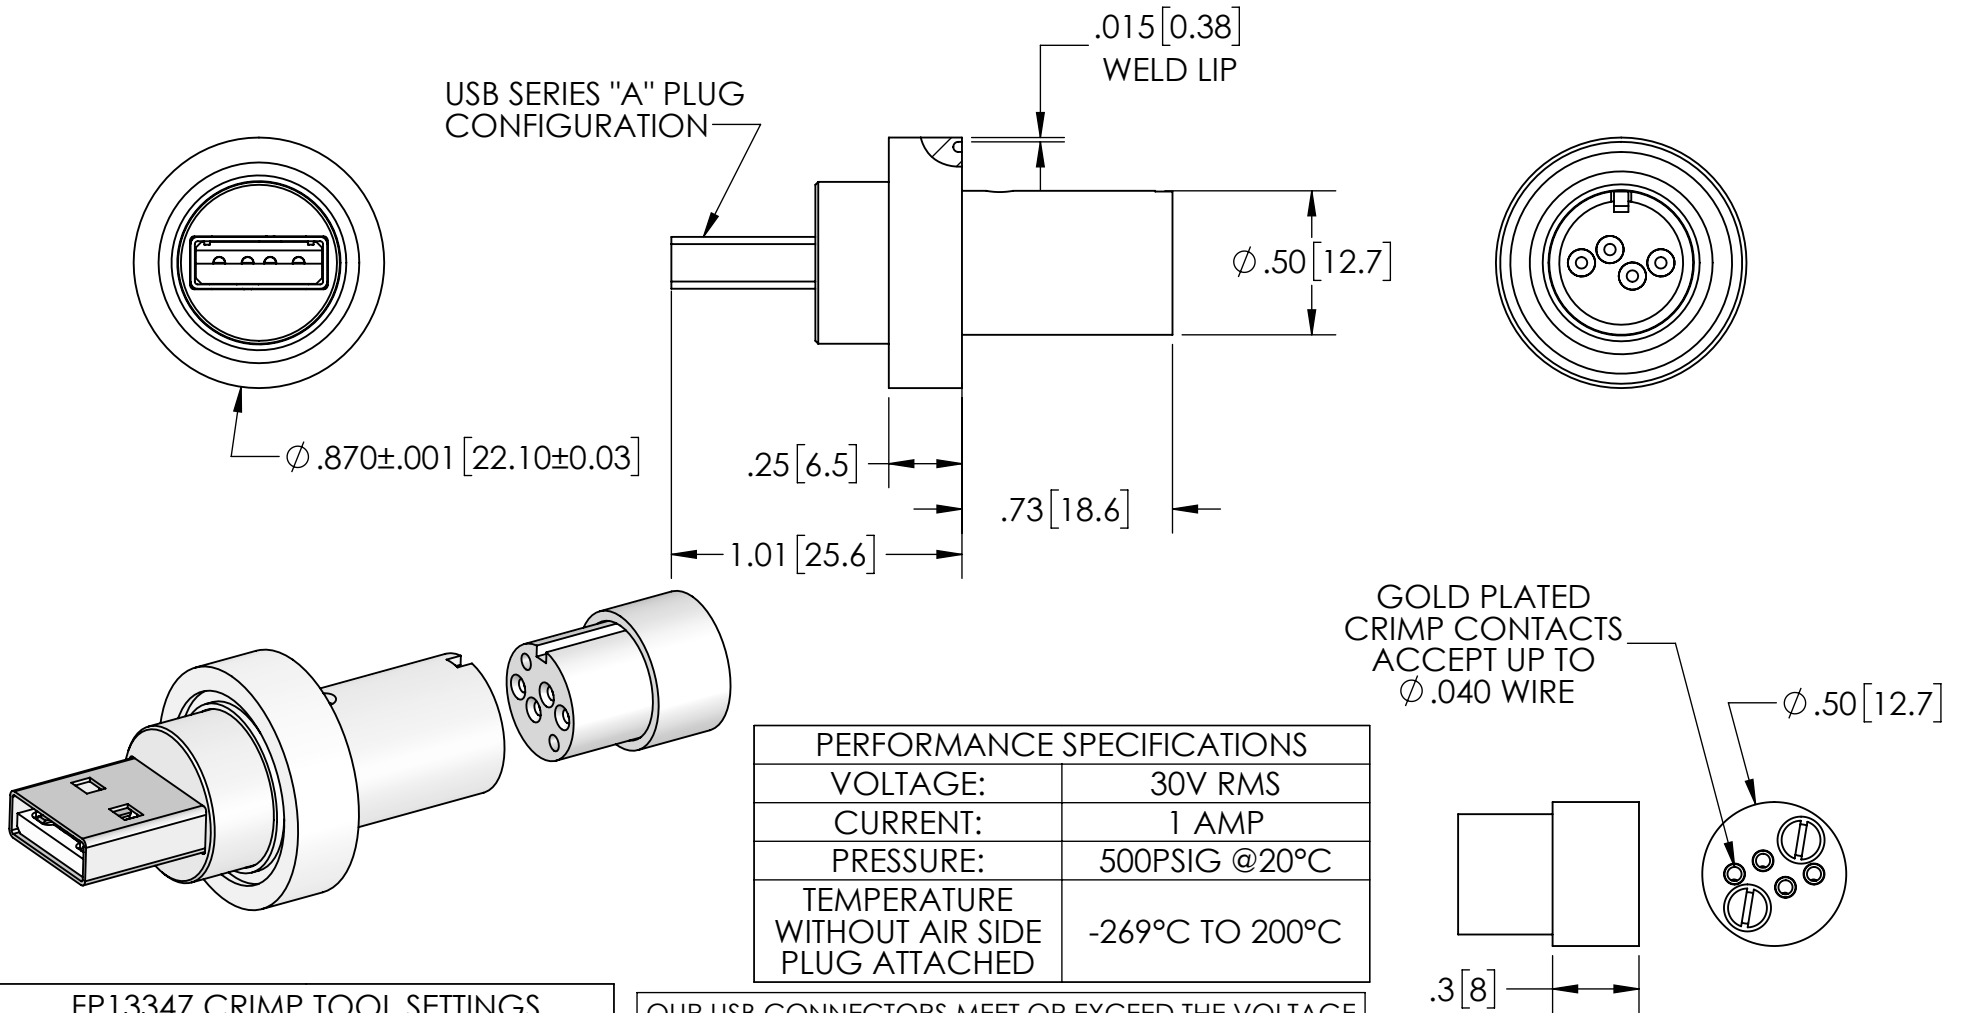

| FP13347 CRIMP TOOL SETTINGS | |
|-----------------------------|--------------|
| WIRE AWG | TOOL SETTING |
| 20 | 4 |
| 22 | 3 |
| 24 | 2 |

OUR USB CONNECTORS MEET OR EXCEED THE VOLTAGE AND CURRENT REQUIREMENTS FOR USB 2.0 AND 3.0. WE DO NOT GUARANTEE THE DATA TRANSFER RATE OR ANY OTHER REQUIREMENT OF THE USB SPECIFICATIONS.

MATES WITH STANDARD USB SERIES "A" RECEPTACLE ON AIR SIDE

| | | | | | | | | | |
|--|-------|-------------------------|-----------------|---------------------------|-----------|-------|-----------|---|--|
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED. | | | | THIRD ANGLE PROJECTION | | TITLE | |  SOLID SEALING TECHNOLOGY | |
| USB CONNECTOR | | PART NO. FA25626 REV. A | | WWW.SOLIDSEALING.COM | | | | | |
| REV. | APP'D | DATE | SCALE 1.5:1 | DIMENSIONS IN INCHES [mm] | DRAWN | MH | 7/29/2021 | | |
| A1 | MH | 7/29/2021 | MPCL0391-12PLUG | | ENG APPR. | MH | 7/29/2021 | SALES DWG NO. FA25626SL REV. A1 | |

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.