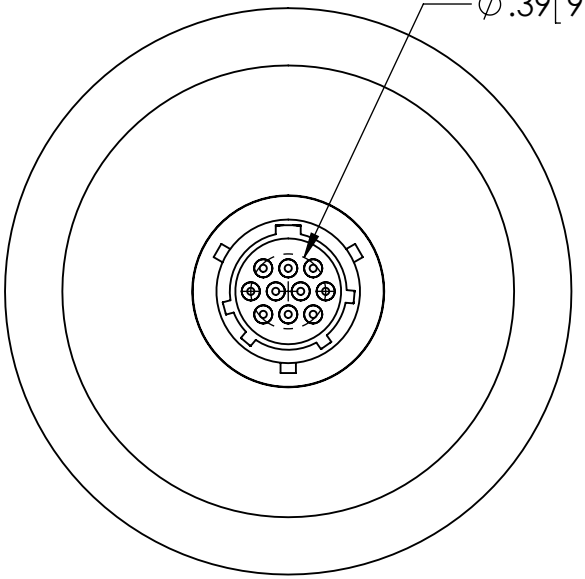

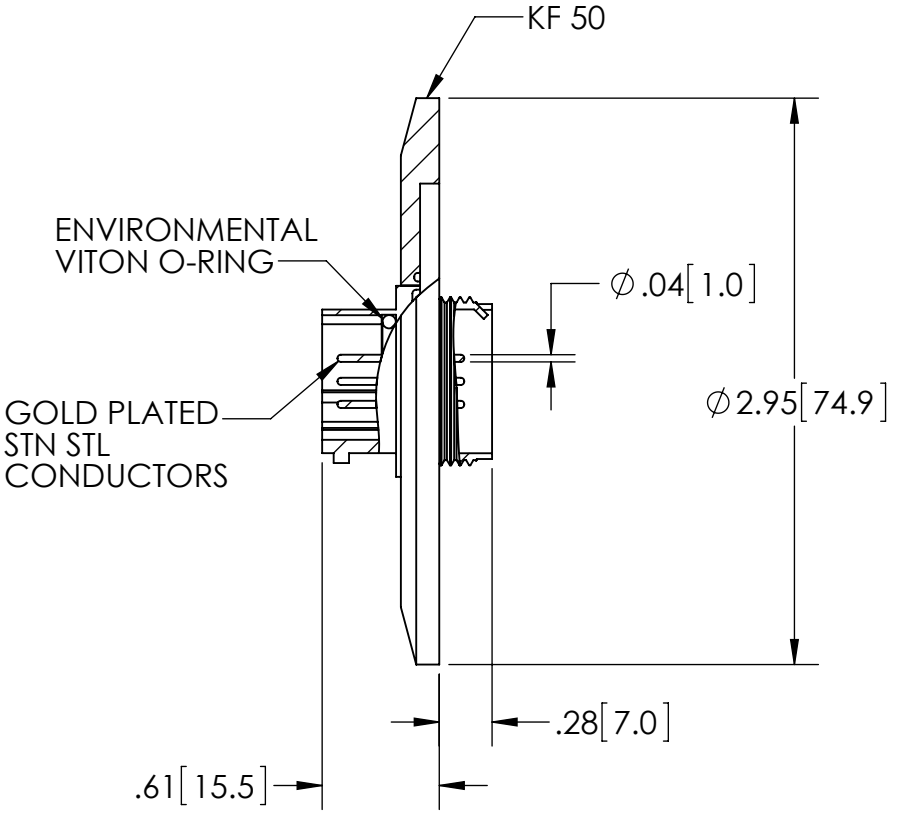

PLUGS SOLD SEPARATELY:
-VACUUM SIDE PEEK PLUG FA13461
-AIR SIDE W/SOLDER CONTACTS FP14900
-AIR SIDE W/CRIMP CONTACTS KT14378

RATINGS	
VOLTAGE:	1 KV DC
CURRENT:	5 AMPS
PRESSURE:	0 PSIG @ 20°C*
TEMPERATURE:	-25°C TO 205°C

*FOR INTERNAL PRESSURE 5 TO 100 PSIG
AN OVERPRESSURE RING IS REQUIRED.

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

TITLE: 10 PIN CONNECTOR

PART NO. FA28625 REV. B

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]
B1	JF	08/07/2017	MPCL0137-04SL	

DRAWN	JF	11/21/2014
ENG APPR.	JF	11/21/2014

SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA28625SL REV. B1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.