


FA33218-XXX

PART NUMBER

NUMBER OF SMPs IN FLANGE  
9 OR 12

AIR SIDE TERMINATION  
eg. F=FULL  
S= SMOOTH  
L= LIMITED

VACUUM SIDE TERMINATION  
eg. F=FULL  
S= SMOOTH  
L= LIMITED

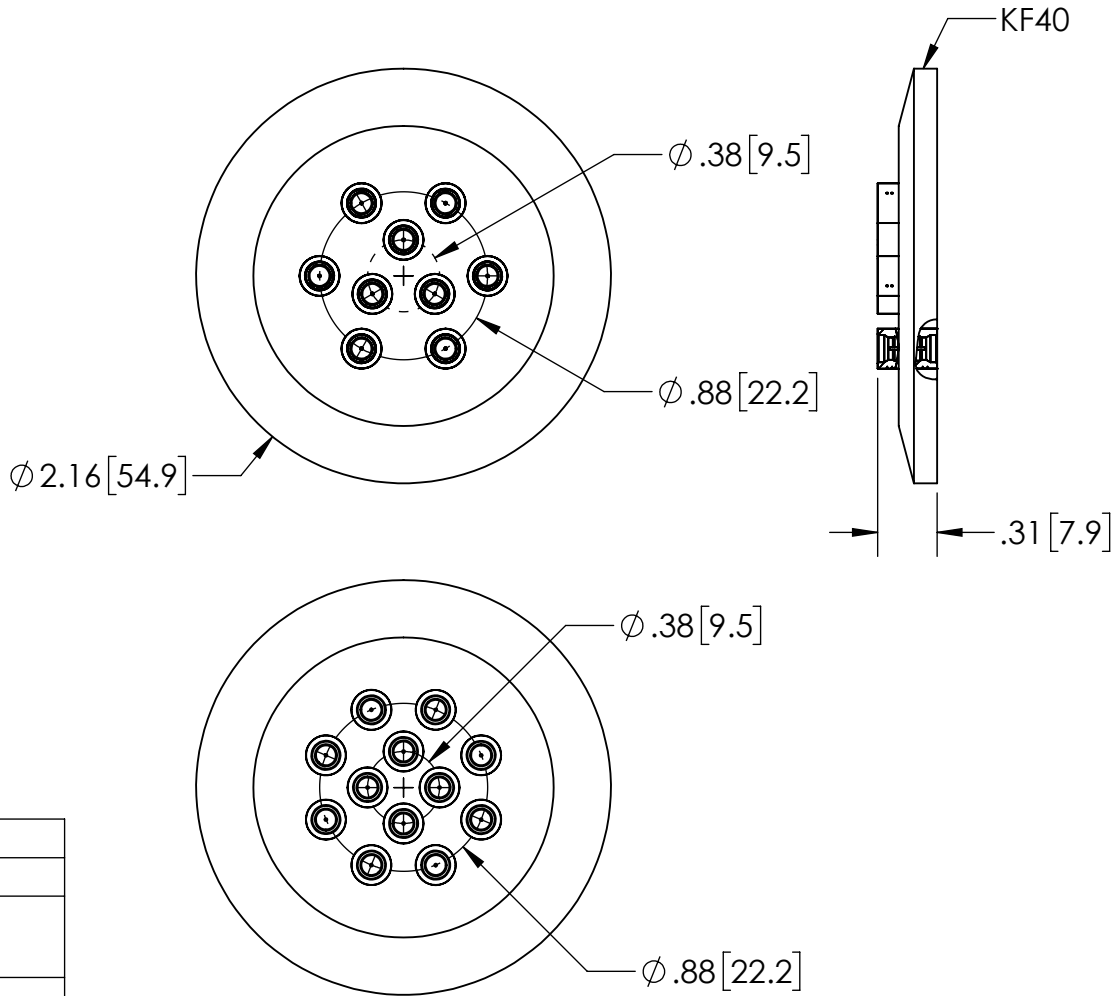

PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	500V RMS
INSULATION RESISTANCE:	> 5000 MΩ
TEMPERATURE WITHOUT PLUG:	-25°C TO 205°C

LEAK RATE <1 X 10E-10 ATM-CC/SEC (He)

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE <b>50 OHM SMP IN KF40 FLANGE</b>			
REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	1/11/2016	PART NO. FA33218 REV. A WWW.SOLIDSEALING.COM	
A3	CW	3/16/2021	COSM0005-11		ENG APPR.	JF	01/26/2016		

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**