


NOTES:

1- THIS FEEDTHRU MUST BE LASER WELDED.

2- FOR INDICATED PRESSURE PERFORMANCE, THE FEEDTHRU MUST BE MECHANICALLY BACKED UP AS SHOWN.

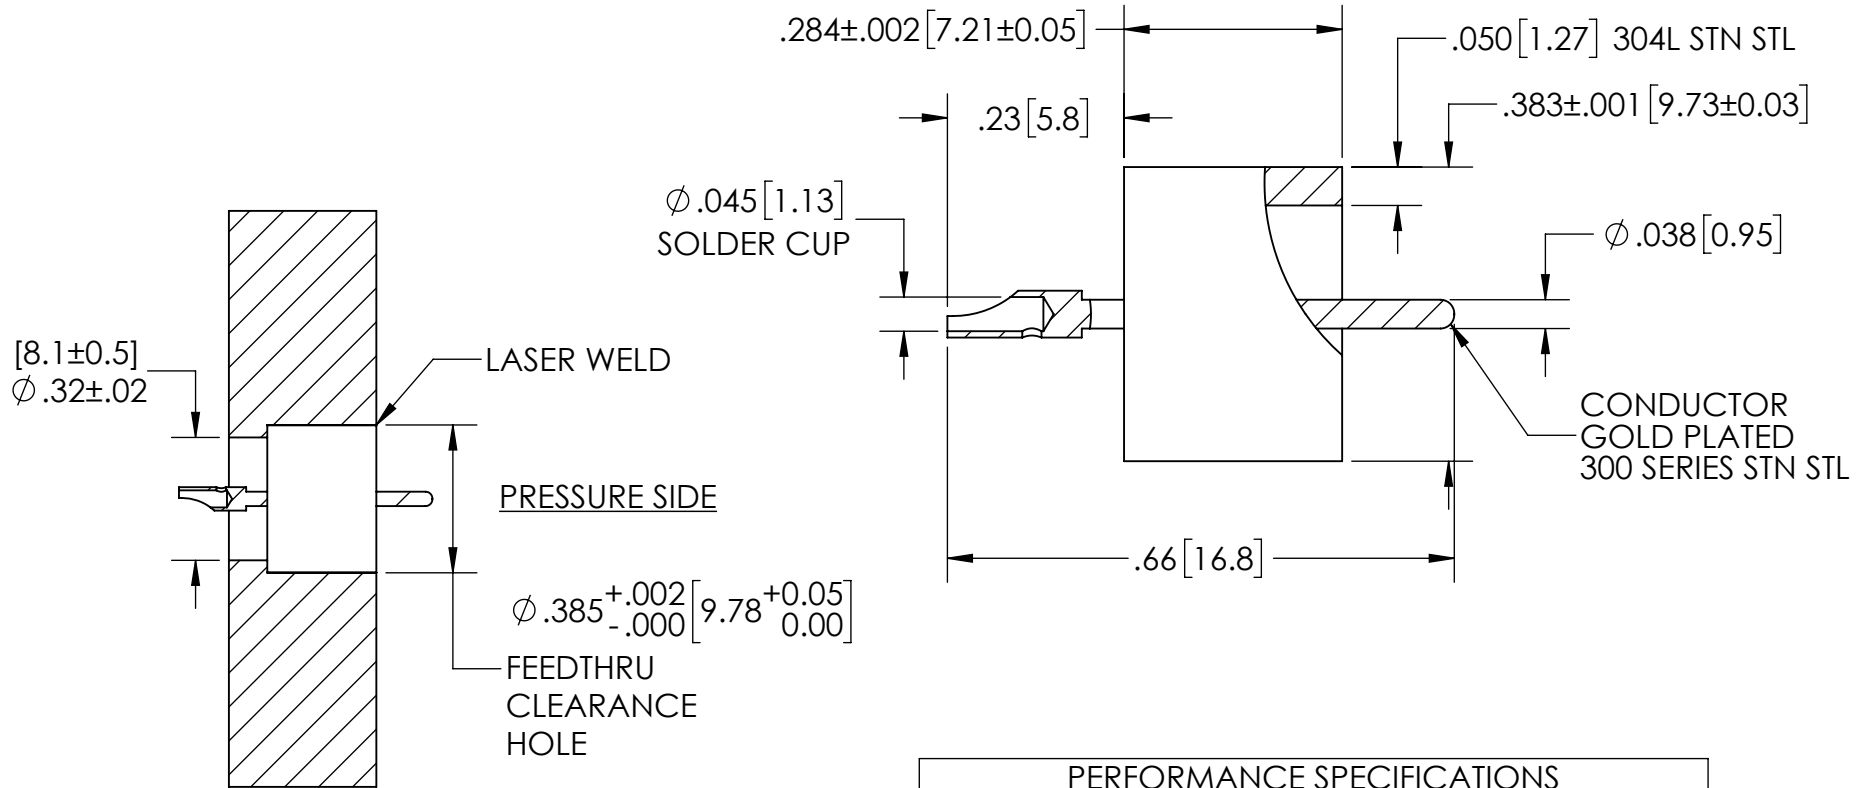

PANEL CUTOUT


PERFORMANCE SPECIFICATIONS

MAX OPERATING VOLTAGE:	3 kV DC
MAX OPERATING CURRENT:	2.5 AMPS
MAX OPERATING PRESSURE:	1300 PSIG @ 20°C
TEMPERATURE RANGE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

FEEDTHRU



**SOLID SEALING TECHNOLOGY**

REV.	APP'D	DATE	SCALE 4:1	DIMENSIONS IN INCHES [mm]	DRAWN	OG	11/13/2018
A2	OG	05/26/2020	FTCL0278-12		ENG APPR.	OG	02/04/2020

PART NO. FA38251 REV. A

WWW.SOLIDSEALING.COM

SALES DWG NO. FA38251SL REV. A2

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**