


MATES WITH STANDARD USB SERIES "A" RECEPTACLE, BOTH ENDS

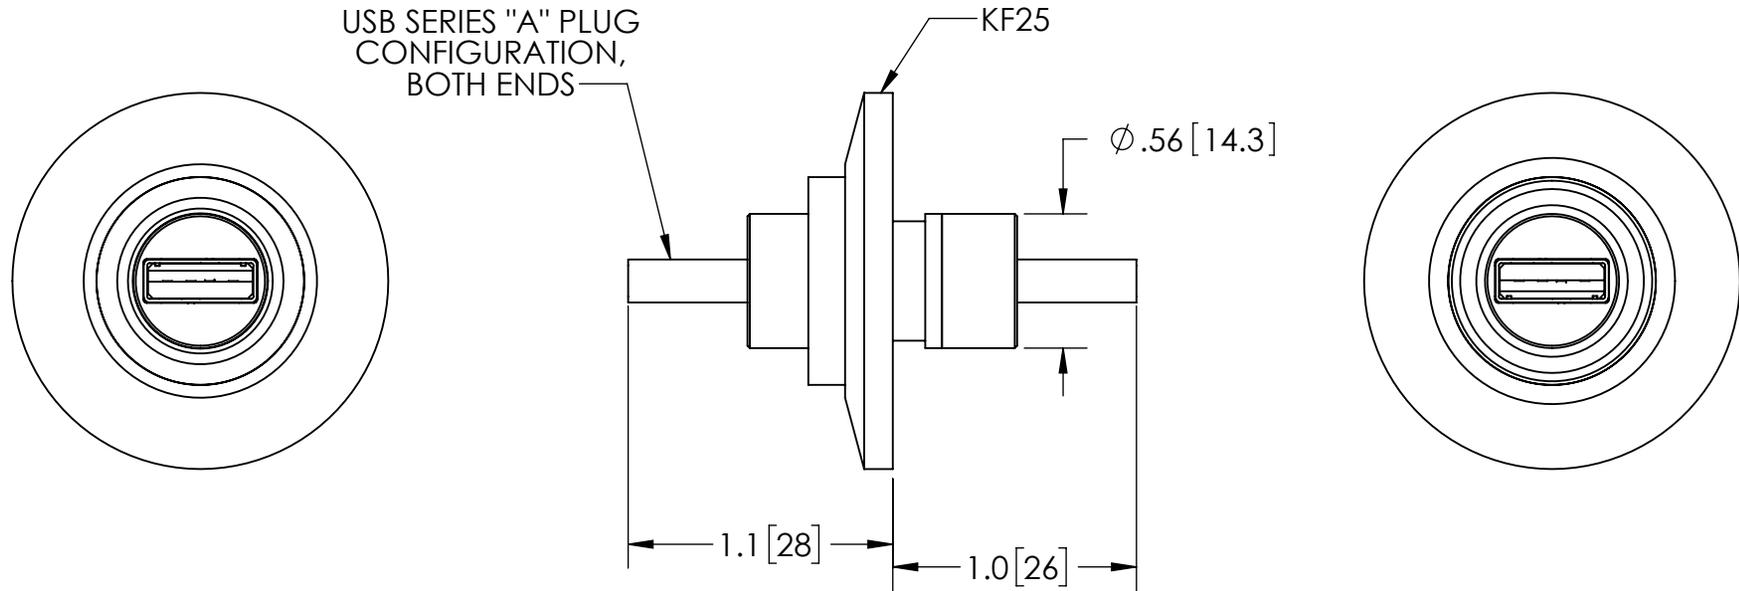

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	30V RMS
CURRENT:	1 AMP
PRESSURE:	0 PSIG @ 20°C*
TEMPERATURE WITHOUT RECEPTACLES ATTACHED:	-25°C TO 200°C

*FOR INTERNAL PRESSURE 5 TO 100 PSIG AN OVERPRESSURE RING IS REQUIRED.

OUR USB CONNECTORS MEET OR EXCEED THE VOLTAGE AND CURRENT REQUIREMENTS FOR USB 2.0 AND 3.0. WE DO NOT GUARANTEE THE DATA TRANSFER RATE OR ANY OTHER REQUIREMENT OF THE USB SPECIFICATIONS.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE USB CONNECTOR			
REV.	APP'D	DATE	SCALE 1.25:1	DIMENSIONS IN INCHES [mm]	DRAWN	JF	05/11/2021	PART NO. FA40225 REV. A	WWW.SOLIDSEALING.COM
A1	JF	05/11/2021	MPCL0322-14		ENG APPR.	JF	05/11/2021		SALES DWG NO. FA40225SL REV. A1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.