



MATING FLANGE MINIMUM ID IS  $\phi 2.50$

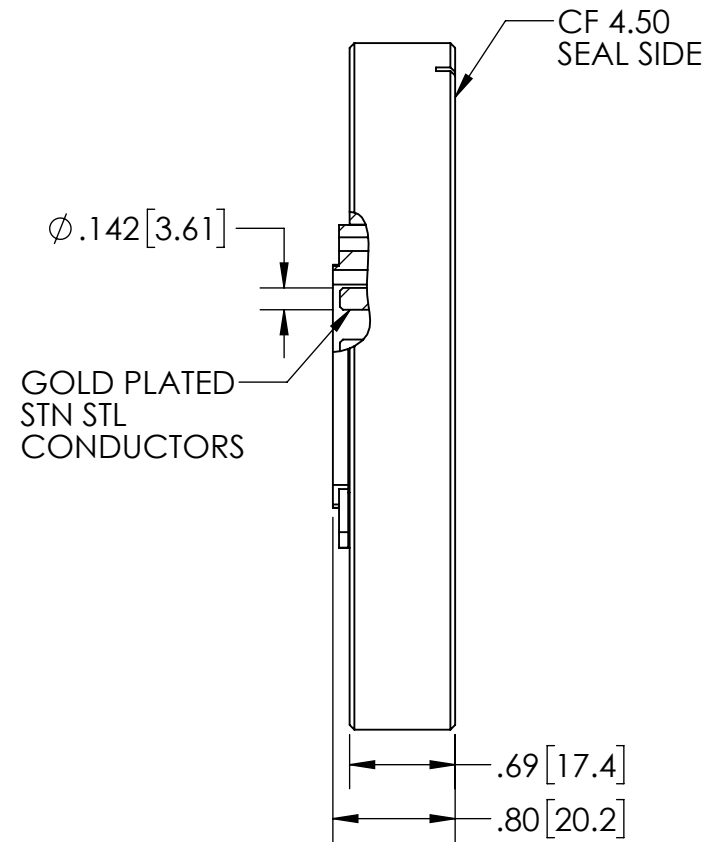

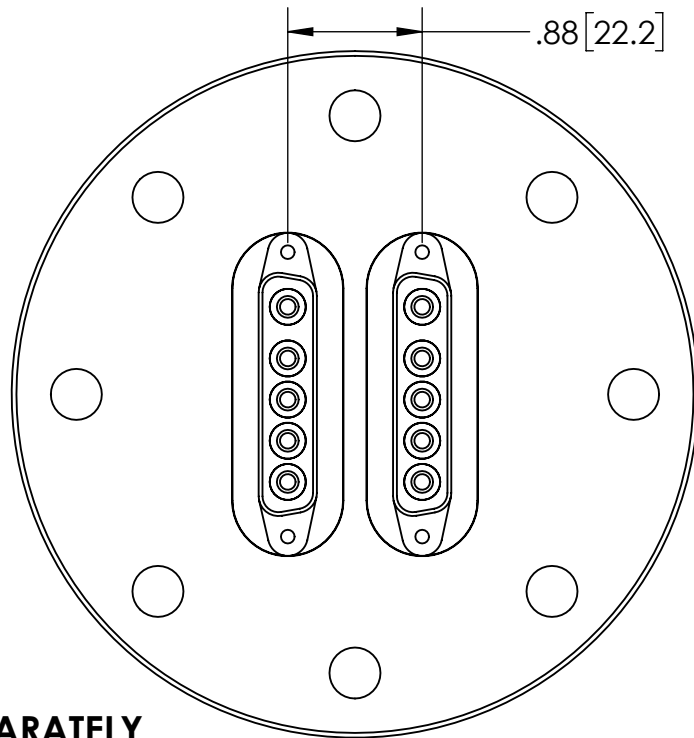

## SOLD SEPARATELY PLUGS, CONTACTS & ACCESSORIES

ACCESSORY	PART NUMBER
AIR SIDE PLUG	FP39752
VACUUM SIDE PLUG	FA39753
PLASTIC BACK SHELL (AIR SIDE)	FP16882
METAL BACK SHELL (VAC SIDE)	FA18855
CONTACT 12 AWG (20 AMP)	FP39118
CONTACT 16 AWG (10 AMP)	FP39118-02
CONTACT CRIMP TOOL	FP39756
CRIMP LOCATOR	FP39764
CONTACT REMOVAL TOOL	FP39757

PERFORMANCE SPECIFICATIONS	
VOLTAGE	500V DC
CURRENT	20 AMPS
TEMPERATURE WITHOUT PLUGS	-269°C TO 350°C

LEAK RATE  $<1 \times 10^{-10}$  ATM-CC/SEC (He)

PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				 THIRD ANGLE PROJECTION		TITLE  5 PIN SUB D POWER CONNECTORS				 <b>SOLID SEALING</b> TECHNOLOGY		
REV.	APP'D	DATE	SCALE 4:5	DIMENSIONS IN INCHES [mm]	DRAWN	JF	8/4/2020	PART NO. FA41215 REV. A			WWW.SOLIDSEALING.COM	
A3	JF	11/25/2024	MPCL0701-11		ENG APPR.	JF	8/4/2020				SALES DWG NO. FA41215SL REV. A3	

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**