


SCALE 1:1

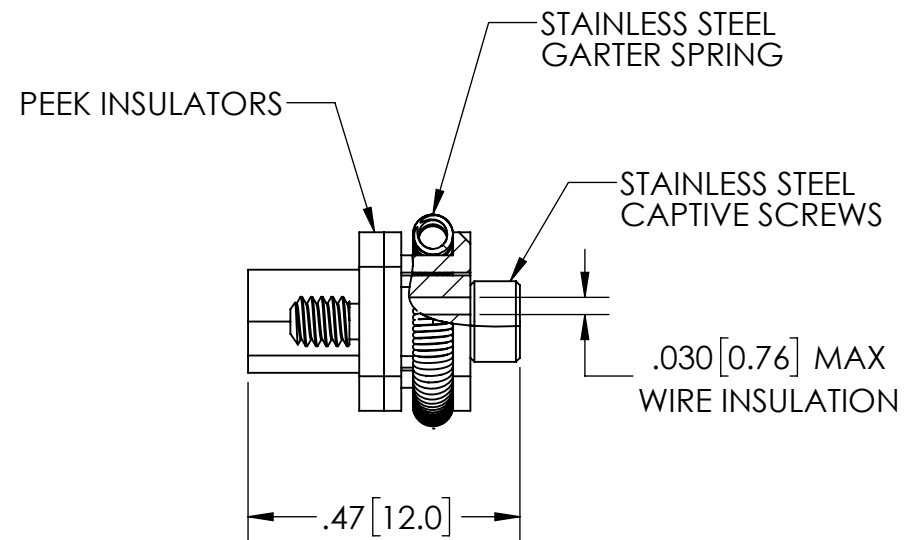

### CONTACTS SOLD SEPARATELY

- GOLD PLATED BRASS/BeCu CRIMP CONTACTS: KT41236
- GOLD PLATED TeCu/BeNi CRIMP CONTACTS: KT41236-02

PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	250V DC
TEMPERATURE (WITHOUT CONTACTS):	-55°C TO 200°C*


\*CONTACTS MAY LIMIT HIGHER TEMPERATURE

REFER TO INSTRUCTION SHEET "NS42137" FOR PLUG ASSEMBLY INSTRUCTIONS


<p>PROPRIETARY AND CONFIDENTIAL</p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.</p>				<p>THIRD ANGLE PROJECTION</p> 		<p>TITLE</p> <p>9 PIN MICRO D+ PLUG</p>			 <p><b>SOLID SEALING</b> TECHNOLOGY</p>	
REV.	APP'D	DATE	SCALE 3:1	DIMENSIONS IN INCHES [mm]	DRAWN	CW	4/21/2021	PART NO. FA42137 REV. A	WWW.SOLIDSEALING.COM	
A2	JF	04/29/2021	MSPLR006-11		ENG APPR.	JF	04/21/2021		SALES DWG NO. FA42137SL REV. A2	

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**


## 3 PINS



HERMETIC  
FEEDTHRU  
FA42916  
(LASER WELD ONLY)




PLUG  
FA42930\*




PRE-WIRED PLUG  
-KAPTON: FA43039  
-PTFE: FA43040


## 7 PINS




HERMETIC  
FEEDTHRU  
FA41283



PLUG  
FA41289\*




IN-VAC  
RECEPTACLE  
FA42367




PRE-WIRED PLUG  
-KAPTON: FA42314  
-PTFE: FA42315


## 19 PINS




PLUG  
FA41232\*



HERMETIC  
FEEDTHRU  
FA41401




IN-VAC  
RECEPTACLE  
FA41656




PRE-WIRED PLUG  
-KAPTON: FA42316  
-PTFE: FA42317


## 55 PINS




PLUG  
FA42256\*

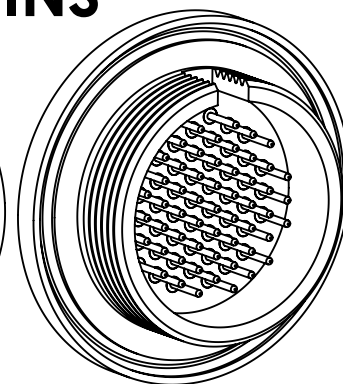

HERMETIC FEEDTHRU  
FA42250

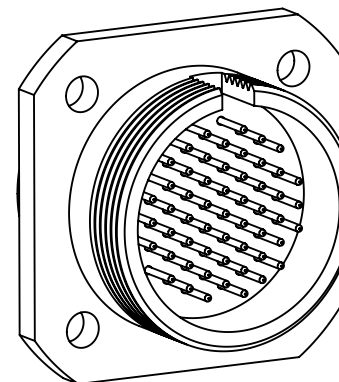

IN-VAC  
RECEPTACLE  
FA42375

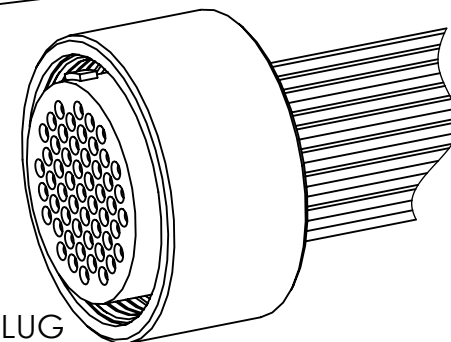


PRE-WIRED PLUG  
-KAPTON: FA42318  
-PTFE: FA42319

**\*CONTACTS NOT INCLUDED**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

MICRO SERIES FAMILY



**SOLID SEALING**  
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	MPC10735-11	INCHES [mm]	ENG APPR.	HJ	05/03/2021


REV: A2

WWW.SOLIDSEALING.COM


SALES DWG NO. MICRO\_SERIES REV. A2

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***


## 9 PINS

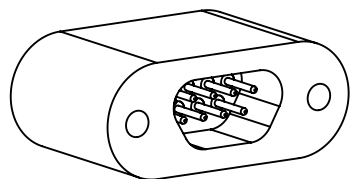


HERMETIC  
FEEDTHROUGH FA41500



HERMETIC SOLDERCUP  
FEEDTHROUGH FA42164




PLUG, GARTER TYPE  
FA42137

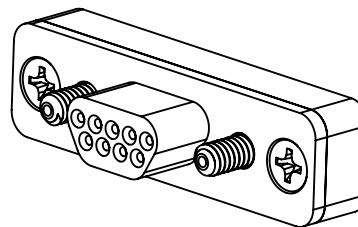


PLUG, SCREW TYPE: FA41506

PRE-WIRED PLUG  
-KAPTON: FA42239  
-PTFE: FA42419

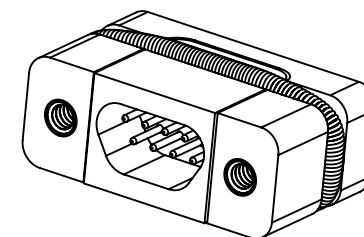


IN-VAC  
RECEPTACLE  
FA42394


## 15 PINS

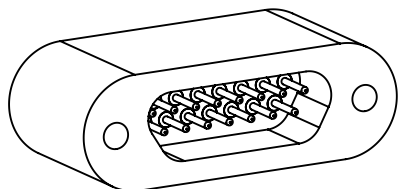


HERMETIC  
FEEDTHROUGH FA42273



HERMETIC SOLDERCUP  
FEEDTHROUGH FA42467




PLUG, GARTER TYPE  
FA42475

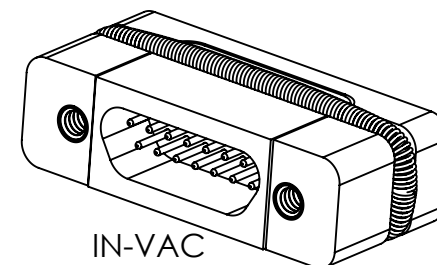


IN-VAC  
RECEPTACLE  
FA42488

## CONTACTS/WIRE




SOCKET CONTACTS  
KT41236 (BRASS 125C)  
KT41236-02 (TeCu 250C)



WIRE  
KAPTON 48": FA42244  
KAPTON 96": FA42245  
PTFE 48": FA42246-01/09  
PTFE 96": FA42247-01/09



CRIMP TOOL  
POSITIONER (PIN & SOCKET)  
FP41731

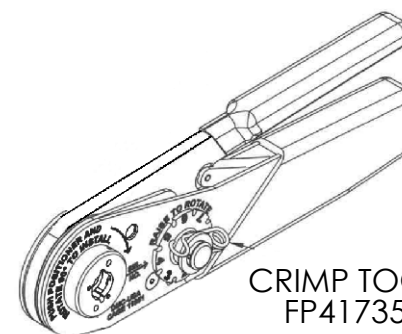

CRIMP TOOL  
FP41735

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

MICRO SERIES FAMILY



**SOLID SEALING**  
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	AHDWR027-41	INCHES [mm]	ENG APPR.	HJ	05/03/2021

REV. A2

WWW.SOLIDSEALING.COM

SALES DWG NO. MICRO\_SERIES REV. A2

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***