


GOLD PLATED BRASS/BeCu CRIMP CONTACTS


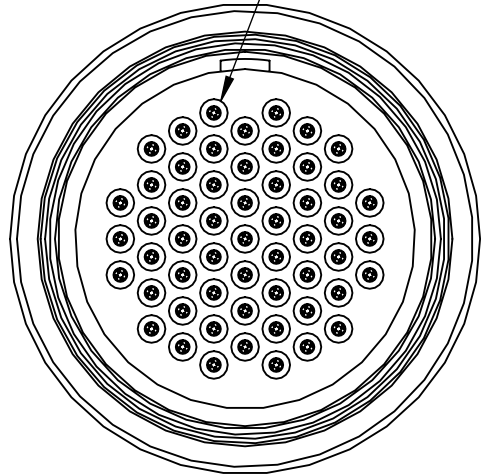


PEEK INSULATOR

$\phi .82 [20.7]$

KNURLED STAINLESS STEEL COUPLING NUT

28 AWG SILVER PLATED COPPER WIRE WITH COLORED PTFE INSULATION (SEE SHEET 2 FOR COLOR POSITIONS)

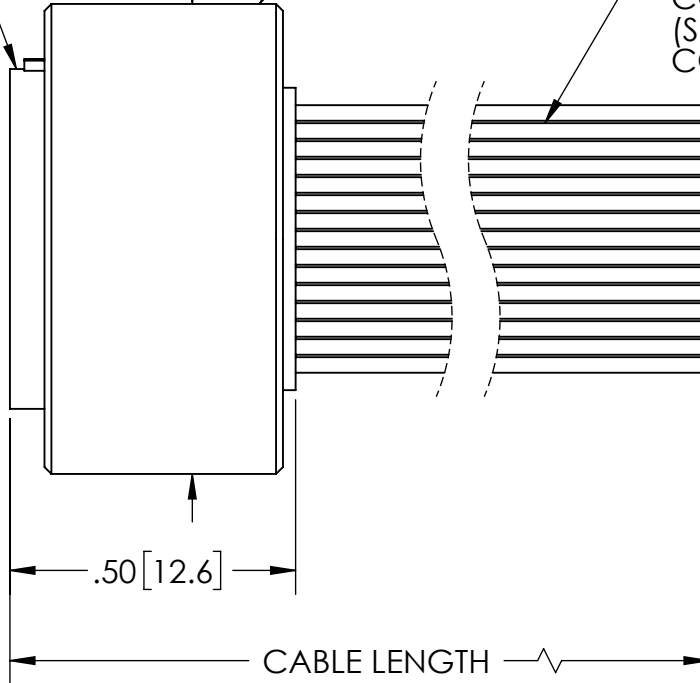

$\phi .03 [0.7]$


PART NO.	CABLE LENGTH
FA42319	48"
FA42319-02	96"

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	250V DC
CURRENT:	3 AMPS
TEMPERATURE:	-55°C TO 125°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE

MICRO C, 55 PIN AIR SIDE PLUG CABLE ASSEMBLY



SOLID SEALING TECHNOLOGY

REV.	APP'D	DATE	SCALE 3:1	DIMENSIONS IN INCHES [mm]	DRAWN	CW	4/15/2021
A2	JF	08/06/2021	MSMM0128-33		ENG APPR.	JF	04/20/2021

PART NO. (SEE TABLE) REV. A


WWW.SOLIDSEALING.COM

SALES DWG NO. FA42319SL REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


POSITION	COLOR
1	BLK
2	BRN
3	RED
4	ORN
5	YEL
6	GRN
7	BLU
8	PUR
9	GRY
10	WHT
11	BLK
12	BRN
13	RED
14	ORN
15	YEL
16	GRN
17	BLU
18	PUR
19	GRY
20	WHT
21	BLK
22	BRN
23	RED
24	ORN
25	YEL
26	GRN
27	BLU
28	PUR

POSITION	COLOR
29	GRY
30	WHT
31	BLK
32	BRN
33	RED
34	ORN
35	YEL
36	GRN
37	BLU
38	PUR
39	GRY
40	WHT
41	BLK
42	BRN
43	RED
44	ORN
45	YEL
46	GRN
47	BLU
48	PUR
49	GRY
50	WHT
51	BLK
52	BRN
53	RED
54	ORN
55	YEL

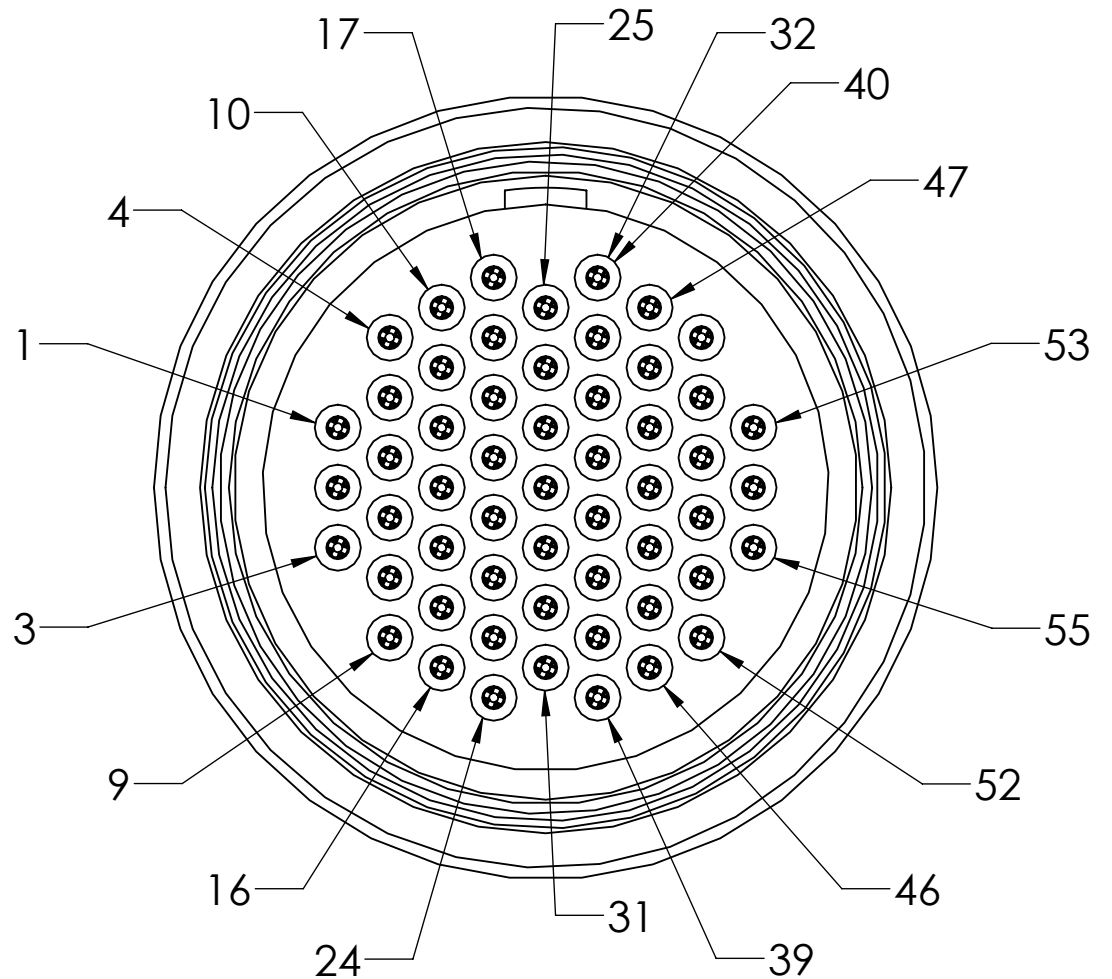

INSULATION COLOR POSITIONS
VIEW A-A (MATING FACE)
 SCALE 5:1

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE
 SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
 REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
 PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE
**MICRO C, 55 PIN AIR SIDE
 PLUG CABLE ASSEMBLY**




REV.	APP'D	DATE	SCALE 3:1	DIMENSIONS IN INCHES [mm]	DRAWN	CW	4/15/2021
A2	JF	08/06/2021	MSMM0128-33		ENG APPR.	JF	04/20/2021

PART NO. (SEE TABLE) REV. A


WWW.SOLIDSEALING.COM
 SALES DWG NO. FA42319SL REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


3 PINS



HERMETIC FEEDTHRU
FA42916
(LASER WELD ONLY)




PLUG
FA42930*




PRE-WIRED PLUG
-KAPTON: FA43039
-PTFE: FA43040


7 PINS




HERMETIC FEEDTHRU
FA41283



PLUG
FA41289*




IN-VAC RECEPTACLE
FA42367

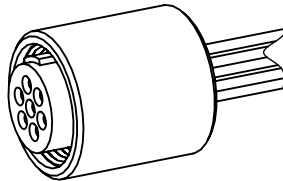


PRE-WIRED PLUG
-KAPTON: FA42314
-PTFE: FA42315


19 PINS

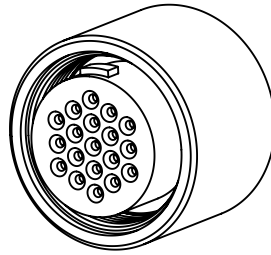


PLUG
FA41232*

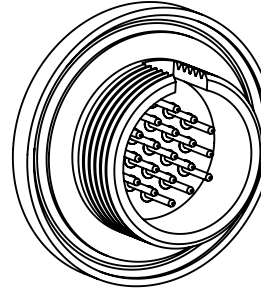

HERMETIC FEEDTHRU
FA41401

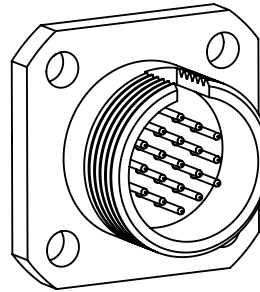


IN-VAC RECEPTACLE
FA41656

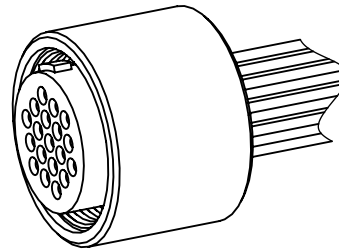


PRE-WIRED PLUG
-KAPTON: FA42316
-PTFE: FA42317


55 PINS

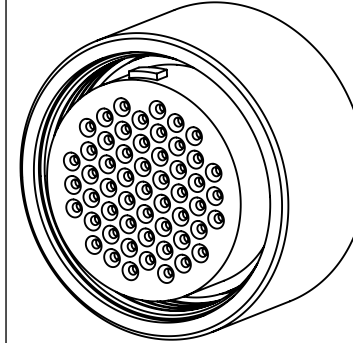


PLUG
FA42256*

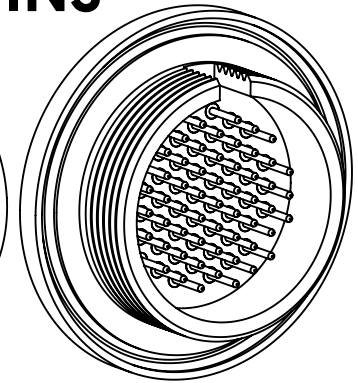

HERMETIC FEEDTHRU
FA42250

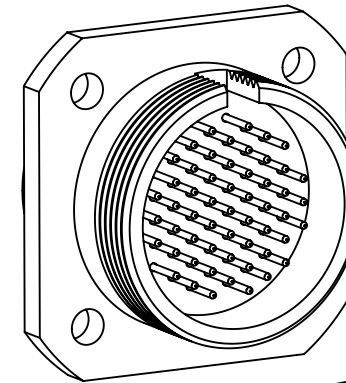

IN-VAC RECEPTACLE
FA42375

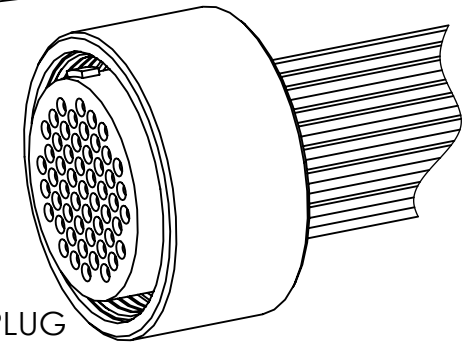


PRE-WIRED PLUG
-KAPTON: FA42318
-PTFE: FA42319

***CONTACTS NOT INCLUDED**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE

MICRO SERIES FAMILY



SOLID SEALING TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN INCHES [mm]	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	MPC10735-11		ENG APPR.	HJ	05/03/2021


REV: A2

WWW.SOLIDSEALING.COM


SALES DWG NO. MICRO_SERIES REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.


9 PINS

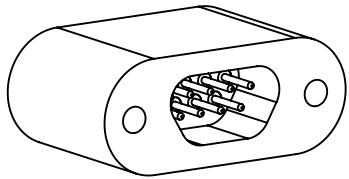


HERMETIC FEEDTHROUGH FA41500

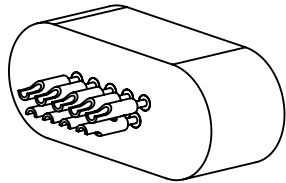


HERMETIC SOLDERCUP FEEDTHROUGH FA42164

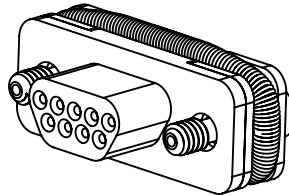

PLUG, GARTER TYPE FA42137

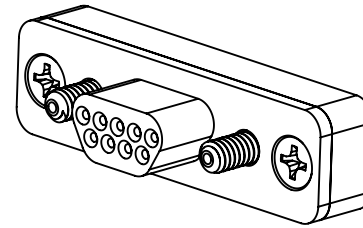


PLUG, SCREW TYPE: FA41506
PRE-WIRED PLUG
-KAPTON: FA42239
-PTFE: FA42419

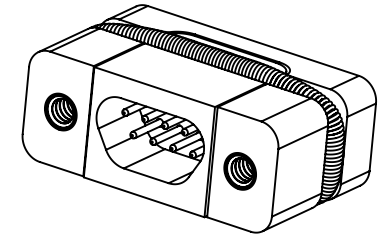


IN-VAC RECEPTACLE FA42394


15 PINS

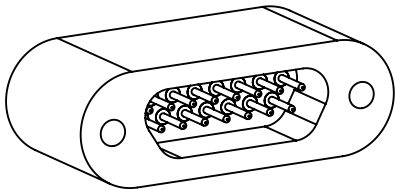


HERMETIC FEEDTHROUGH FA42273

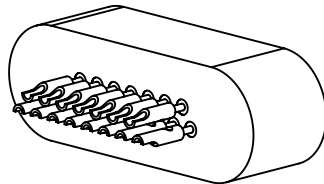

HERMETIC SOLDERCUP FEEDTHROUGH FA42467

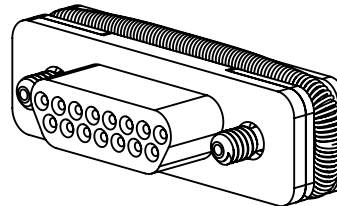


PLUG, GARTER TYPE FA42475

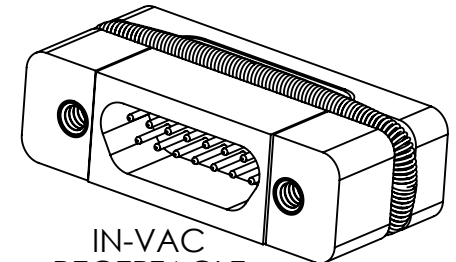


IN-VAC RECEPTACLE FA42488

CONTACTS/WIRE




SOCKET CONTACTS
KT41236 (BRASS 125C)
KT41236-02 (TeCu 250C)



WIRE
KAPTON 48": FA42244
KAPTON 96": FA42245
PTFE 48": FA42246-01/09
PTFE 96": FA42247-01/09



CRIMP TOOL POSITIONER (PIN & SOCKET) FP41731

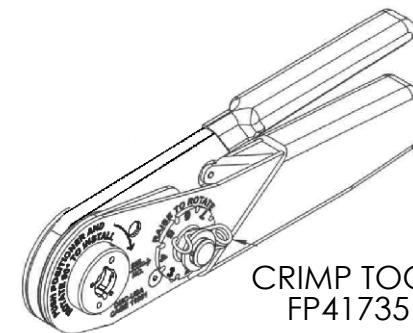


CRIMP TOOL FP41735

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE

MICRO SERIES FAMILY



SOLID SEALING
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN INCHES [mm]	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	AHDWR027-41		ENG APPR.	HJ	05/03/2021

REV. A2

WWW.SOLIDSEALING.COM

SALES DWG NO. MICRO_SERIES REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.