

| PART NO.   | CABLE LENGTH |  |
|------------|--------------|--|
| FA42419    | 48"          |  |
| FA42419-02 | 96"          |  |

| PERFORMANCE SPECFICATIONS |                |  |  |
|---------------------------|----------------|--|--|
| VOLTAGE:                  | 250V DC        |  |  |
| CURRENT:                  | 3 AMPS         |  |  |
| TEMPERATURE:              | -55°C TO 125°C |  |  |

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

TITLE

MICRO D+, 9 PIN AIR SIDE PLUG CABLE ASSEMBLY



SOLID SEALING TECHNOLOGY

REV. APP'D DATE SCALE 3:1

A1 JF 05/17/2021 MSPLR007-14

DIMENSIONS IN INCHES [mm]

DRAWN CW 4/30/2021
BNG APPR. JF 05/17/2021

PART NO. (SEE TABLE) REV. A

WWW.SOLIDSEALING.COM
SALES DWG NO. FA42419SL REV. A1

| POSITION COL  | DR   |  |  |  |  |  |
|---|--|--|--|--|--|--|
| 1 BLk   |  |  |  |  |  |  |
| 2 BRN<br>3 REI  |  |  |  |  |  |  |
| 4 ORI   |  |  |  |  |  |  |
| 5 YEI   |  |  |  |  |  |  |
| 6 GRI   |  |  |  |  |  |  |
| 7 BLU   |  |  |  |  |  |  |
| 8 PUI   |  |  |  |  |  |  |
| 9 GR  | <u></u>  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   | 9—⁄  |  |  |  |  |  |
|   |  |  |  |  |  |  |
| INSULATION COLOR POSITIONS  |  |  |  |  |  |  |
| INSULATION COLOR POSITIONS  VIEW A-A (MATING FACE)  SCALE 6:1       |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
| PROPRIETARY AND CC  | DDO JECTION I ALICEO DI O DINI ALD CIDE I CONTROLLO CONT |  |  |  |  |  |
| THE INFORMATION CONTAINED IN<br>SOLE PROPERTY OF SOLID SEALIN       | TECHNOLOGY, ANY DILL ASSEMBLY  |  |  |  |  |  |
| REPRODUCTION IN PART OR AS A WH<br>PERMISSION OF SOLID SEALING TECH | NOLOGY IS PROHIBITED.  |  |  |  |  |  |
|   | CALE 3:1 DIMENSIONS IN INCHES Imm   DRAWN CW 4/30/2021 PART NO. (SEE TABLE) REV. A SALES DWG NO. EA42410SL REV. A.   |  |  |  |  |  |
| A1 JF 05/17/2021 M  | SALES DWG NO. FA42419SL REV. A1  |  |  |  |  |  |


### 3 PINS



**HERMETIC FEEDTHRU** FA42916 (LASER WELD ONLY)




**PLUG** FA42930\*




PRE-WIRED PLUG -KAPTON: FA43039 -PTFE: FA43040

### 7 PINS




**HERMETIC FEEDTHRU** FA41283






IN-VAC **RECEPTACLE** FA42367




PRE-WIRED PLUG -KAPTON: FA42314 -PTFE: FA42315


### **19 PINS**




FA41232\*



**HERMETIC FEEDTHRU** FA41401




IN-VAC **RECEPTACLE** FA41656



PRE-WIRED PLUG -KAPTON: FA42316 -PTFE: FA42317


### \*CONTACTS NOT INCLUDED


# 55 PINS **PLUG** FA42256\*



IN-VAC

**RECEPTACLE** FA42375

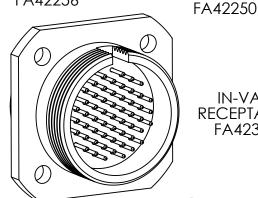

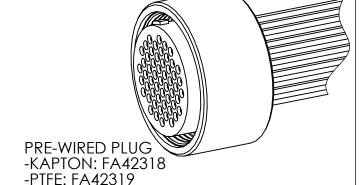

#### PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITI F

MICRO SERIES FAMILY



**SOLID SEALING** ECHNOLOGY

WWW.SOLIDSEALING.COM SALES DWG NO. MICRO\_SERIES REV. A2


DATE SCALE 2:1 4/21/2022 MPCL0735-11 CW

DIMENSIONS IN INCHES [mm]


04/09/2021 DRAWN ENG APPR. HJ 05/03/2021

REV: A2


### 9 PINS




HERMETIC FEEDTHROUGH FA41500



HERMETIC SOLDERCUP FEEDTHROUGH FA42164




PLUG, GARTER TYPE FA42137




PLUG, SCREW TYPE: FA41506

PRE-WIRED PLUG -KAPTON: FA42239 -PTFE: FA42419




IN-VAC RECEPTACLE FA42394


### **15 PINS**




HERMETIC FEEDTHROUGH FA42273




HERMETIC SOLDERCUP FEEDTHROUGH FA42467




PLUG, GARTER TYPE FA42475



## **CONTACTS/WIRE**



SOCKET CONTACTS KT41236 (BRASS 125C) KT41236-02 (TeCu 250C)



WIRE KAPTON 48": FA42244 KAPTON 96": FA42245 PTFE 48": FA42246-01/09 PTFE 96": FA42247-01/09



CRIMP TOOL
POSITIONER (PIN & SOCKET)
FP41731



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION

TITLE

MICRO SERIES FAMILY



SOLID SEALING TECHNOLOGY

| REV. | APP'D | DATE      | SCALE 2:1      | DIMENSIONS IN |
|------|-------|-----------|----------------|---------------|
| ۸2   | CW    | 4/21/2022 | A LIDW/D027 41 | INCHES [mm]   |

DRAWN HJ 04/09/2021

BNG APPR. HJ 05/03/2021

REV. A2

WWW.SOLIDSEALING.COM
SALES DWG NO. MICRO\_SERIES REV. A2