


SCALE 1:1

### CONTACTS SOLD SEPARATELY

- GOLD PLATED BRASS/BeCu CRIMP CONTACTS: KT41236
- GOLD PLATED TeCu/BeNi CRIMP CONTACTS: KT41236-02

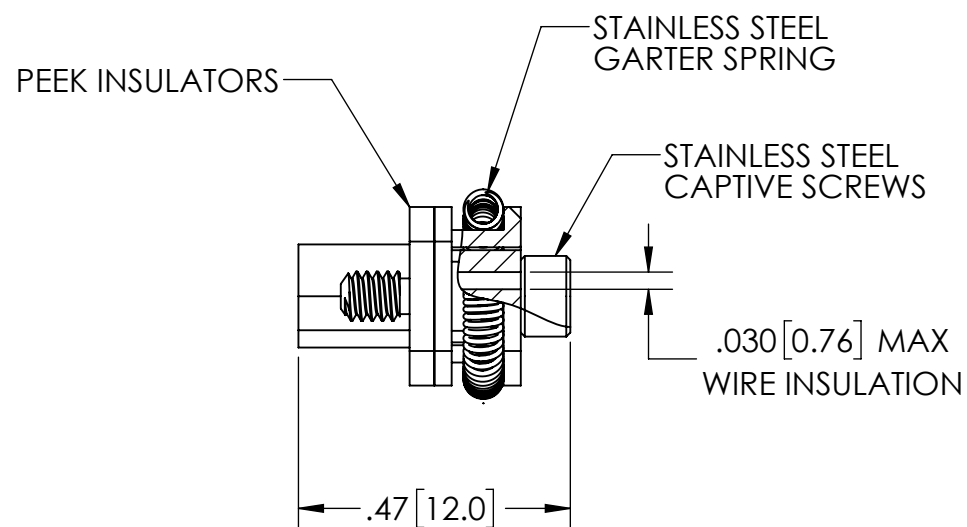

PERFORMANCE SPECIFICATIONS	
VOLTAGE (DWV):	250V DC
TEMPERATURE (WITHOUT CONTACTS):	-55°C TO 200°C*


\*CONTACTS MAY LIMIT HIGHER TEMPERATURE

REFER TO INSTRUCTION SHEET "NS42475" FOR PLUG ASSEMBLY INSTRUCTIONS


PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 	TITLE 15 PIN MICRO D+ PLUG				
REV.	APP'D	DATE	SCALE 3:1	DIMENSIONS IN INCHES [mm]	DRAWN	CW	4/29/2021	PART NO. FA42475 REV. A	WWW.SOLIDSEALING.COM
A1	JF	05/07/2021	MSPLR008-11		ENG APPR.	JF	05/07/2021		SALES DWG NO. FA42475SL REV. A1

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***


## 3 PINS



HERMETIC  
FEEDTHRU  
FA42916  
(LASER WELD ONLY)




PLUG  
FA42930\*




PRE-WIRED PLUG  
-KAPTON: FA43039  
-PTFE: FA43040


## 7 PINS




HERMETIC  
FEEDTHRU  
FA41283



PLUG  
FA41289\*




IN-VAC  
RECEPTACLE  
FA42367




PRE-WIRED PLUG  
-KAPTON: FA42314  
-PTFE: FA42315


## 19 PINS




PLUG  
FA41232\*



HERMETIC  
FEEDTHRU  
FA41401




IN-VAC  
RECEPTACLE  
FA41656




PRE-WIRED PLUG  
-KAPTON: FA42316  
-PTFE: FA42317


## 55 PINS




PLUG  
FA42256\*

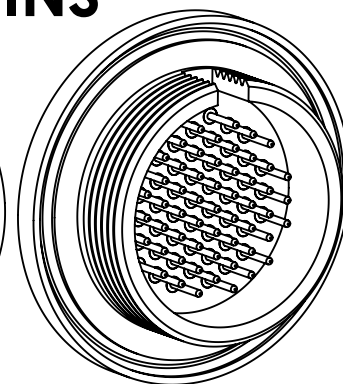

HERMETIC FEEDTHRU  
FA42250

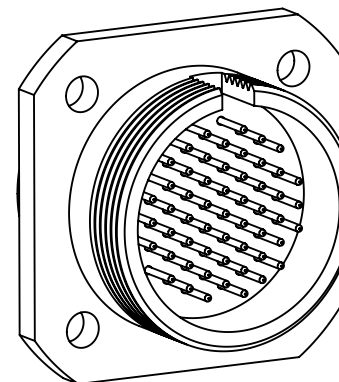

IN-VAC  
RECEPTACLE  
FA42375

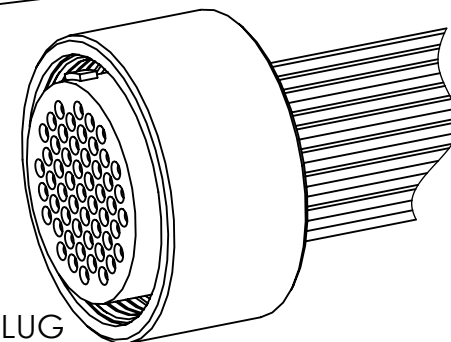


PRE-WIRED PLUG  
-KAPTON: FA42318  
-PTFE: FA42319

**\*CONTACTS NOT INCLUDED**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

MICRO SERIES FAMILY



**SOLID SEALING**  
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	MPC10735-11	INCHES [mm]	ENG APPR.	HJ	05/03/2021


REV: A2

WWW.SOLIDSEALING.COM


SALES DWG NO. MICRO\_SERIES REV. A2

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***


## 9 PINS

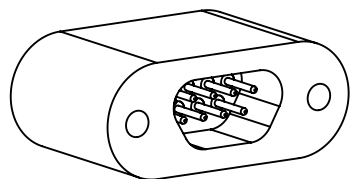


HERMETIC  
FEEDTHROUGH FA41500



HERMETIC SOLDERCUP  
FEEDTHROUGH FA42164




PLUG, GARTER TYPE  
FA42137

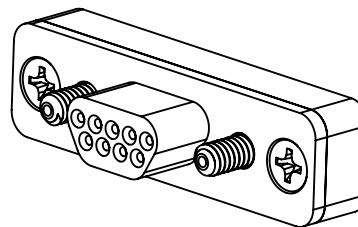


PLUG, SCREW TYPE: FA41506

PRE-WIRED PLUG  
-KAPTON: FA42239  
-PTFE: FA42419

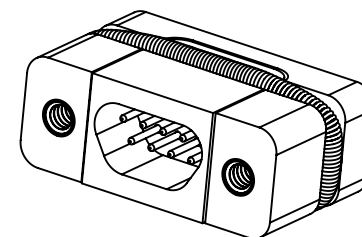


IN-VAC  
RECEPTACLE  
FA42394


## 15 PINS

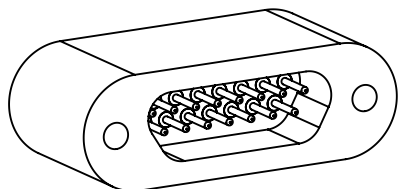


HERMETIC  
FEEDTHROUGH FA42273



HERMETIC SOLDERCUP  
FEEDTHROUGH FA42467




PLUG, GARTER TYPE  
FA42475

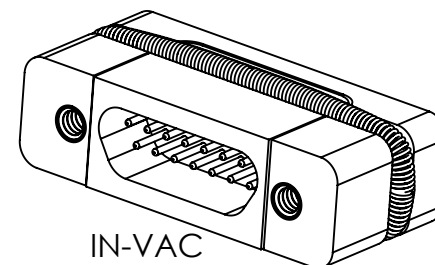


IN-VAC  
RECEPTACLE  
FA42488

## CONTACTS/WIRE




SOCKET CONTACTS  
KT41236 (BRASS 125C)  
KT41236-02 (TeCu 250C)



WIRE  
KAPTON 48": FA42244  
KAPTON 96": FA42245  
PTFE 48": FA42246-01/09  
PTFE 96": FA42247-01/09



CRIMP TOOL  
POSITIONER (PIN & SOCKET)  
FP41731

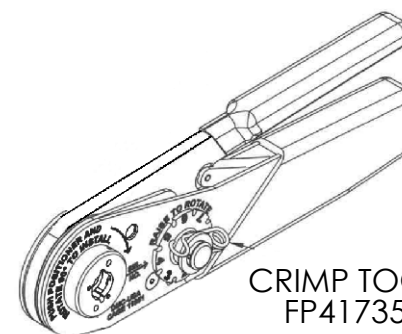

CRIMP TOOL  
FP41735

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE  
PROJECTION



TITLE

MICRO SERIES FAMILY



**SOLID SEALING**  
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN	DRAWN	HJ	04/09/2021
A2	CW	4/21/2022	AHDWR027-41	INCHES [mm]	ENG APPR.	HJ	05/03/2021

REV. A2

WWW.SOLIDSEALING.COM

SALES DWG NO. MICRO\_SERIES REV. A2

***DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.***