



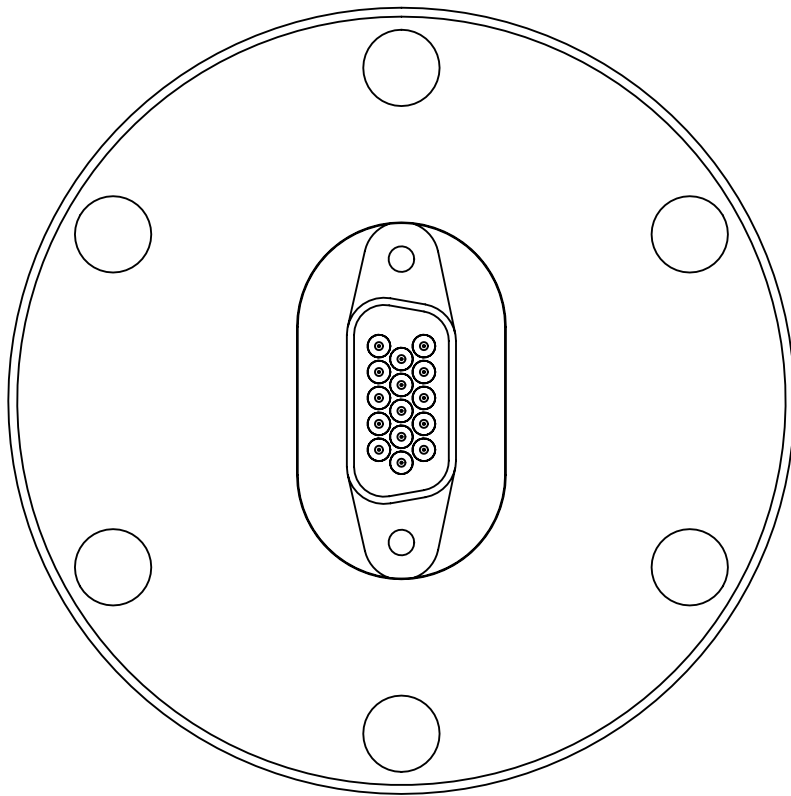

Ø .03 [0.7]
GOLD PLATED
STN STL
CONDUCTORS

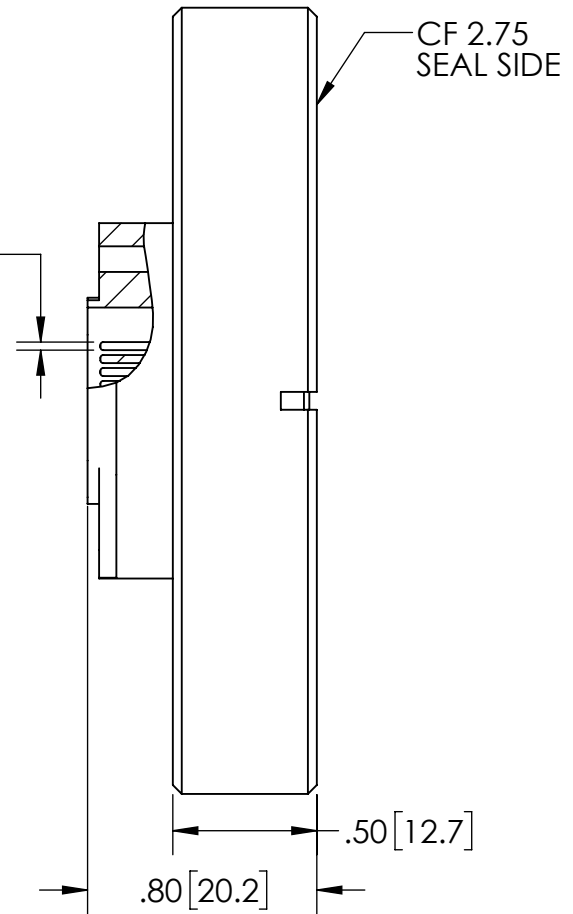

PLUGS SOLD SEPARATELY:
-VACUUM SIDE PEEK PLUG FA42809
-AIR SIDE PLUG KT42854


PERFORMANCE SPECIFICATIONS

VOLTAGE:	500V DC
CURRENT:	2 AMPS
TEMPERATURE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE

15 PIN HD SUB D IN 2.75CF



SOLID SEALING
TECHNOLOGY

REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JF	08/28/2026
A1	JF	08/28/2026	MPCL529-11		ENG APPR.	JF	08/28/2026

PART NO. FA52347 REV. A

WWW.SOLIDSEALING.COM

SALES DWG NO. FA52347SL REV. A1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.