


PART NUMBER	MATERIAL	TEMP RANGE
FP38345	VITON	0° TO 400°F
FP38345-02	FLUORINATED SILICONE	-80° TO 450°F
FP38345-03	BUNA-N	-20° TO 250°F
FP38345-04	KALREZ 6230	30° TO 500°F
FP38345-05	EPDM	-70° TO 300°F

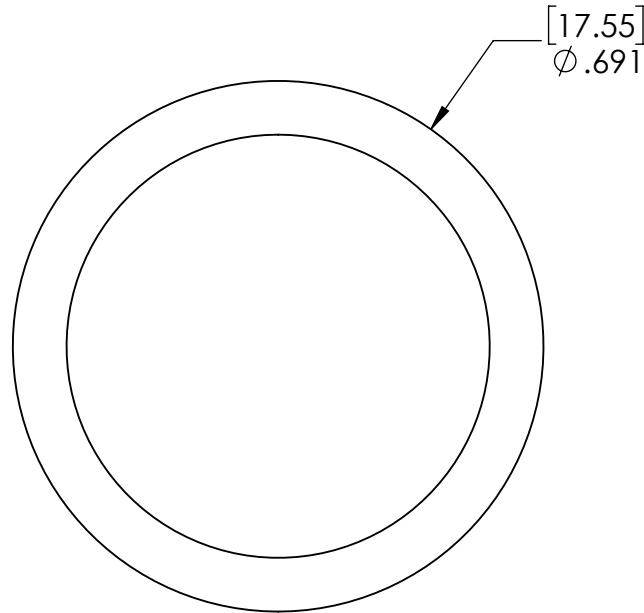

NOTES:  
THIS ACCESSORY O-RING IS FOR USE ON SST JAM NUT/ BASEPLATE OPTICAL FIBER FEEDTHROUGH ADAPTERS.

[WWW.SOLIDSEALING.COM](http://WWW.SOLIDSEALING.COM)

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 			TITLE: O-RING, BASEPLATE FIBER FDTHR		
REV.	APP'D	DATE	SCALE 4:1	DIMENSIONS IN INCHES [mm]	DRAWN	HJ	10/30/2018	PART NO. FP38345 REV. A	
A1	JF	12/11/2018	AHDSR001-V015 FP		ENG APPR.	JF	12/11/2018		

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**