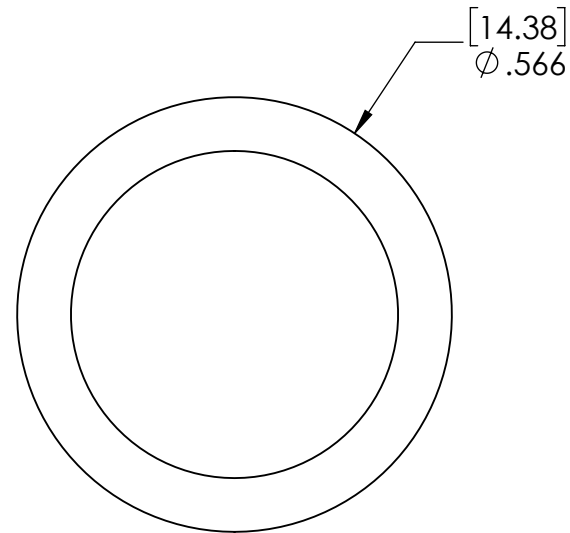




PART NUMBER	MATERIAL	TEMP RANGE
FP38354	VITON	0° TO 400° F
FP38354-02	FLUORINATED SILICONE	-80°C TO 450°F
FP38354-03	BUNA-N	-20° TO 250°F
FP38354-04	KALREZ 6230	30° TO 500°F
FP38354-05	EPDM	-70° TO 300°F



NOTES:

THIS ACCESSORY O-RING IS FOR USE ON SST BORE MOUNT OPTICAL FIBER FEEDTHROUGH ADAPTERS.
TWO O-RINGS ARE REQUIRED WITH EACH FEEDTHROUGH.
O-RINGS SOLD INDIVIDUALLY.

WWW.SOLIDSEALING.COM

<div>PROPRIETARY AND CONFIDENTIAL</div> <div>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.</div>					<div>THIRD ANGLE PROJECTION</div> <div></div>			<div>TITLE:</div> <div>O-RING, BORE MOUNT FIBER FDTHR</div>		<div></div> <div>SOLID SEALING TECHNOLOGY, INC.</div> <div>SALES DWG NO. FP38354SL REV. A1</div>
REV.	APP'D	DATE	SCALE 4:1	DIMENSIONS IN INCHES [mm]	DRAWN	HJ	10/30/2018	PART NO. FP38354 REV. A		
A1	JF	12/11/2018	AHDSR001-V013 FP		ENG APPR.	JF	12/11/2018			

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.