
**CRIMP INSTRUCTIONS:** 

1- CRIMP CONTACTS USING TOOL FP13347 (SEE TABLE FOR SETTINGS).

FP13347 CRIMP TOOL SETTING			
WIRE AWG	TOOL SETTING		
18	5		
20	4		
22	3		
24	2		

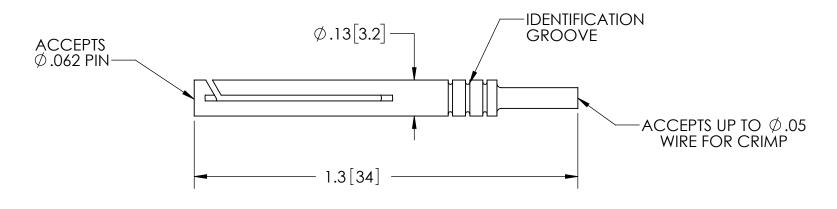

PART NO.	MATERIAL	IDENTIFICATION GROOVE	TEMPERATURE	
KT10898	CHROMEL	YES	-269°C TO 350°C	
KT10898-02	ALUMEL	NO	-207 C 10 330 C	

NOTE: PACKAGE OF 5 CONTACTS

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE

CONTACT CRIMP TYPE



SOLID SEALING TECHNOLOGY

 REV.
 APP'D
 DATE
 SCALE 3:1
 DIMENSIONS IN INCHES [mm]

 B2
 JF
 07/02/2021
 ACNCT001-ST
 INCHES [mm]

N DRAWN MH 10/26/2006 ENG APPR. MH 10/27/2006

PART NO. (SEE TABLE) REV. B

WWW.SOLIDSEALING.COM
SALES DWG NO. KT10898SL REV. B2