


CRIMP INSTRUCTIONS:
1- CRIMP CONTACTS USING TOOL FP13347 (SEE TABLE FOR SETTINGS).

FP13347 CRIMP TOOL SETTING	
WIRE AWG	TOOL SETTING
20	4
22	3
24	2

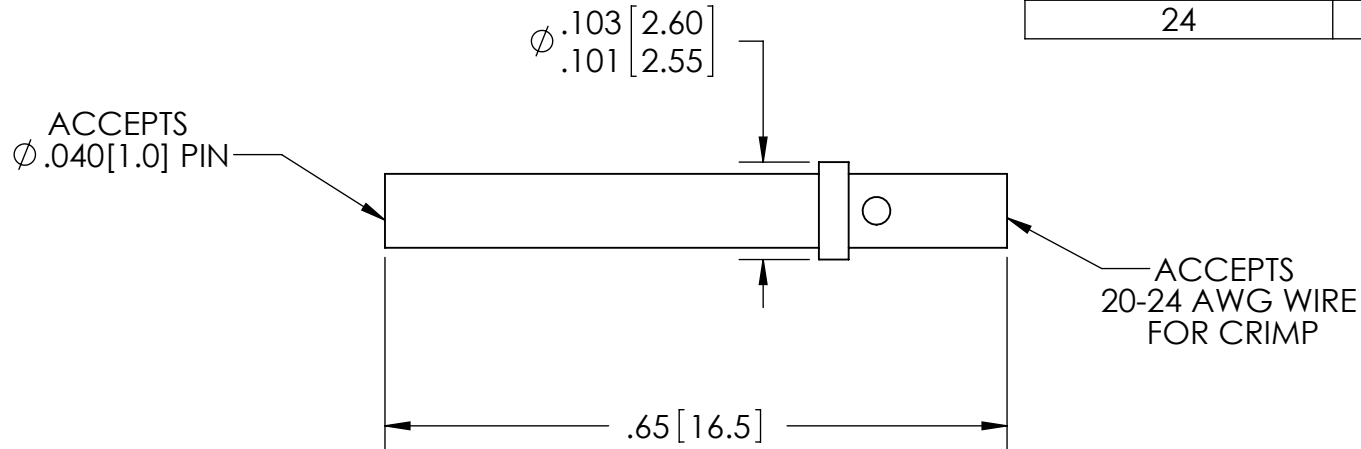

PART NO.	MATERIAL	VACUUM RATING	COLOR BANDS
KT13353	COPPER ALLOY GOLD FLASH	HIGH VACUUM	BROWN-BROWN-GREEN
KT13353-02	CHROMEL	HIGH VACUUM	BROWN-YELLOW-BROWN
KT13353-03	ALUMEL	HIGH VACUUM	BROWN-YELLOW-BLACK
KT13353-11	COPPER ALLOY GOLD FLASH	ULTRA-HIGH VACUUM	NONE


PERFORMANCE SPECIFICATIONS	
MATERIAL:	SEE TABLE AT LEFT
VACUUM RATING:	SEE TABLE AT LEFT
CURRENT:	7.5 AMPS
TEMPERATURE:	-65°C TO 200°C

NOTE: PACKAGE OF 5 CONTACTS

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE
PROJECTION



TITLE

CRIMP CONTACT



SOLID SEALING
TECHNOLOGY

REV.	APP'D	DATE	SCALE 5:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	10/27/2006
F3	JF	07/02/2021	ACDCN010-1ST		ENG APPR.	JS	11/02/2011

PART NO. (SEE TABLE) REV. F

WWW.SOLIDSEALING.COM

SALES DWG NO. KT13353SL REV. F3

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.