


CRIMP INSTRUCTIONS:  
 1- CRIMP CONTACTS USING TOOL FP13347 (SEE TABLE FOR SETTINGS).

FP13347 CRIMP TOOL SETTING	
WIRE AWG	TOOL SETTING
20	4
22	3
24	2

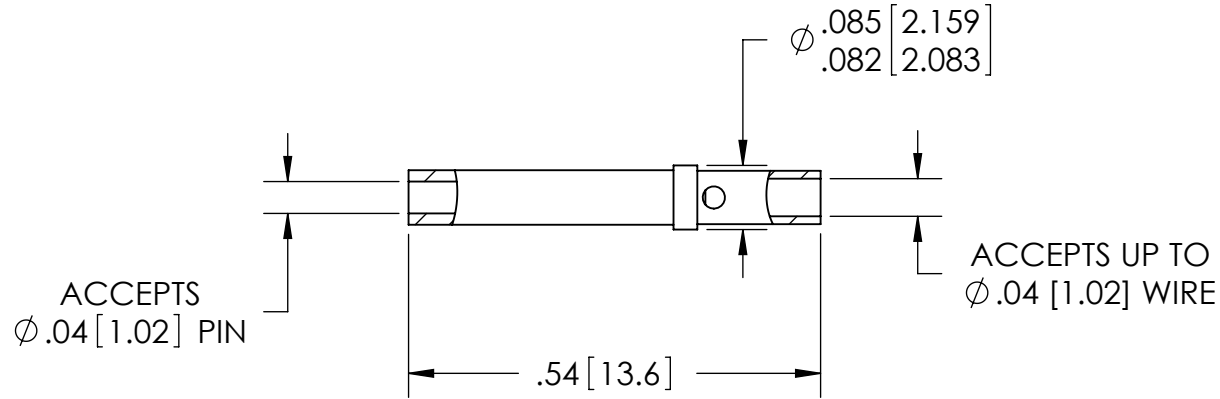

PERFORMANCE SPECIFICATIONS	
MATERIAL:	COPPER ALLOY GOLD FLASH
CURRENT:	7.5 AMPS
TEMPERATURE:	-55°C TO 125°C

NOTE: PACKAGE OF 5 CONTACTS

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE <b>SOCKET CONTACT</b>			
REV.	APP'D	DATE	SCALE 4:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	01/30/2007	PART NO. KT14601 REV. C	WWW.SOLIDSEALING.COM
C2	JF	07/02/2021	ACDCN010-04		ENG APPR.	MH	01/30/2007		SALES DWG NO. KT14601SL REV. C2

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**