
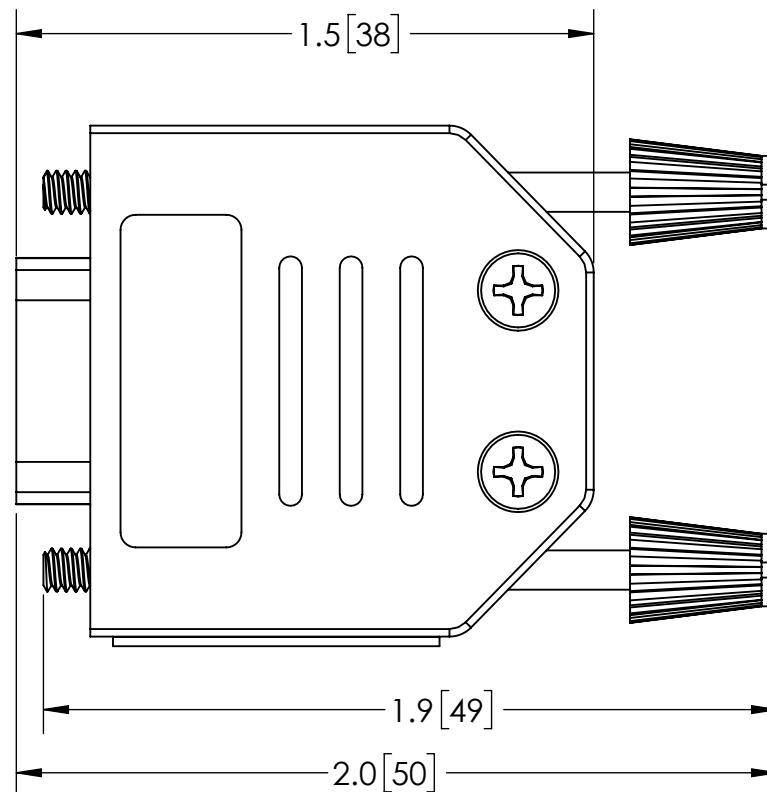


GOLD PLATED
SOLDER CUP
CONTACTS

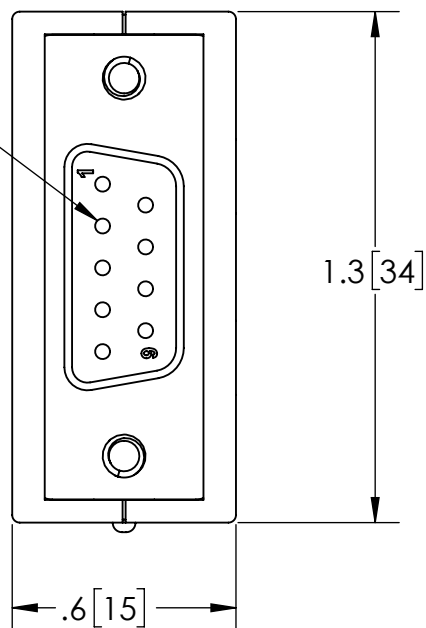


SPECIFICATIONS
STEEL SHELL W/ TIN PLATING
GLASS FILLED THERMOPLASTIC INSULATOR, RATED UL94V-0
BLACK PLASTIC HOOD - RATED UL94HB,
HINGED W 4-40 THREADED THUMBSCREWS

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	500V DC
CURRENT:	5 AMPS
TEMPERATURE:	-50°C TO 105°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE
PROJECTION



TITLE

9 PIN SUB-D AIR SIDE PLUG



SOLID SEALING
TECHNOLOGY

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	8/7/2007
A2	JF	07/29/2021	KT14876-11		ENG APPR.	MH	05/23/2008

PART NO. KT14876 REV. A

WWW.SOLIDSEALING.COM

SALES DWG NO. KT14876SL REV. A2

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.