


CRIMP INSTRUCTIONS:  
 1- CRIMP USING FP31723 CRIMP TOOL AND FP32470 LOCATOR (SEE TABLE FOR SETTINGS).

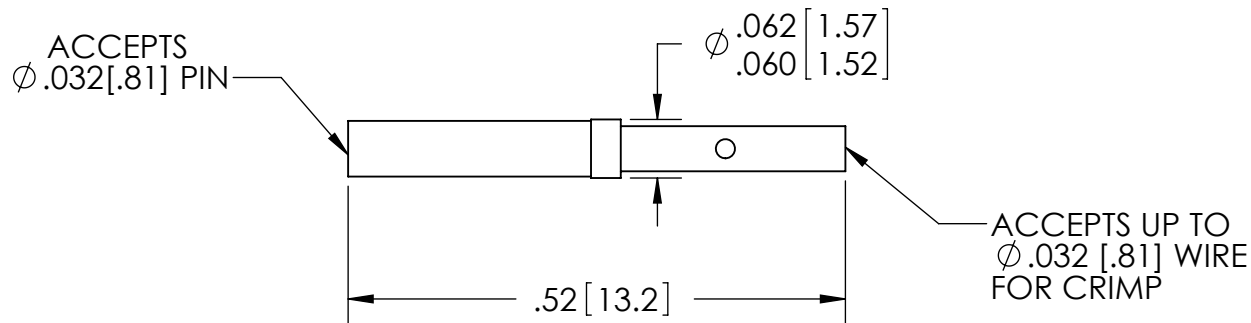

CRIMP SETTING				
WIRE AWG	22	24	26	28
-22D SEL CONTACT	3	2	1	1

PERFORMANCE SPECIFICATIONS	
MATERIAL:	COPPER ALLOY GOLD FLASH
CURRENT:	5 AMPS
TEMPERATURE:	-269°C TO 200°C

NOTE: PACKAGE OF 5 CONTACTS

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE CRIMP CONTACT			
REV.	APP'D	DATE	SCALE 5:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	7/18/2008	PART NO. KT17972 REV. B WWW.SOLIDSEALING.COM	
B4	JF	07/08/2021	ACDCN010-06		ENG APPR.	MH	08/18/2008		

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**