



SILVER PLATED
SIZE 4 CRIMP CONTACT



ACCEPTS
4 AWG WIRE
FOR CRIMP

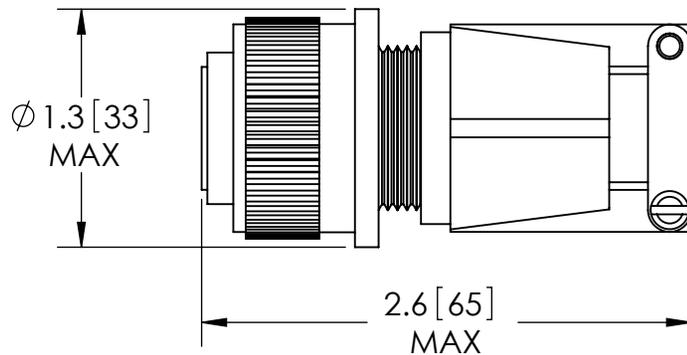

| RATINGS | |
|-----------------------------|-----------------|
| VOLTAGE: | 700 V DC |
| CURRENT @ ROOM TEMPERATURE: | 120 AMPS |
| PRESSURE: | 500 PSIG @ 20°C |
| TEMPERATURE WITHOUT PLUG: | -269°C TO 450°C |
| TEMPERATURE WITH PLUG: | -55°C TO 125°C |

-AMPHENOL AMPHE-POWER ® SERIES STRAIGHT AIR SIDE PLUG INCLUDED.
FOR INSTALLATION INSTRUCTIONS REFER TO AMPHENOL ® PUBLICATION L-757.

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. KT20495SL REV. A5

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

ONE PIN CONNECTOR

PART NO. KT20495 REV. A

| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | JS | 6/18/2009 |
|------|-------|------------|-------------|---------------------------|-----------|----|------------|
| A5 | JF | 09/12/2019 | MPC10279-11 | | ENG APPR. | MH | 07/01/2009 |

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.