
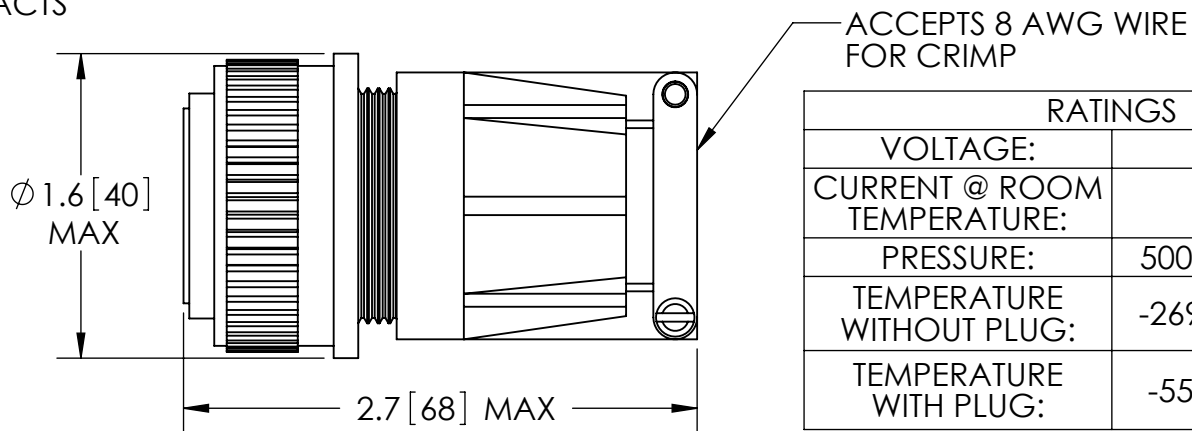


SILVER PLATED
SIZE 8 CRIMP CONTACTS

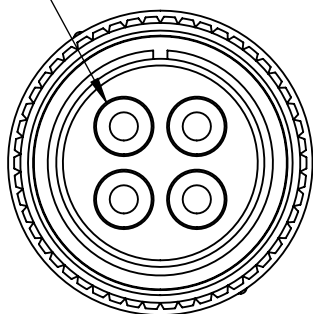

RATINGS	
VOLTAGE:	700 V DC
CURRENT @ ROOM TEMPERATURE:	69 AMPS
PRESSURE:	500 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-55°C TO 125°C

-AMPHENOL AMPHE-POWER® SERIES STRAIGHT AIR SIDE PLUG INCLUDED.
FOR INSTALLATION INSTRUCTIONS REFER TO AMPHENOL® PUBLICATION L-757. PLUG INCLUDED

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 			TITLE: FOUR PIN CONNECTOR		
REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	6/18/2009	PART NO. KT20679 REV. A	
A5	JF	09/12/2019	MPDP0098-11		ENG APPR.	MH	07/01/2009		

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.