
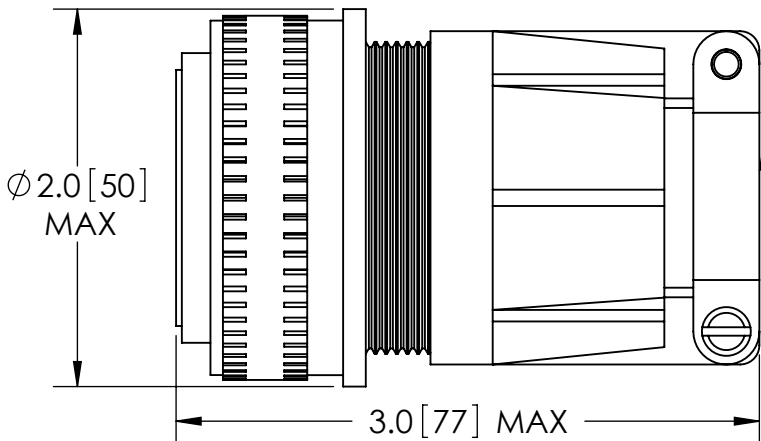


SILVER PLATED
SIZE 4 CRIMP CONTACTS

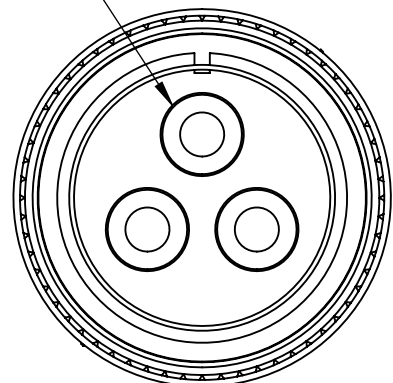


RATINGS	
VOLTAGE:	1250 V DC
CURRENT @ ROOM TEMPERATURE:	120 AMPS
PRESSURE:	125 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-55°C TO 125°C

-AMPHENOL AMPHE-POWER ® SERIES STRAIGHT AIR SIDE PLUG INCLUDED.
FOR INSTALLATION INSTRUCTIONS REFER TO AMPHENOL ® PUBLICATION L-757.

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE:
THREE PIN CONNECTOR



REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]
A5	JF	09/12/2019	MPCLO282-12	

DRAWN	JS	6/18/2009
ENG APPR.	MH	07/01/2009

PART NO. KT20681 REV. A

SOLID SEALING TECHNOLOGY, INC.
SALES DWG NO. KT20681SL REV. A5

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.