
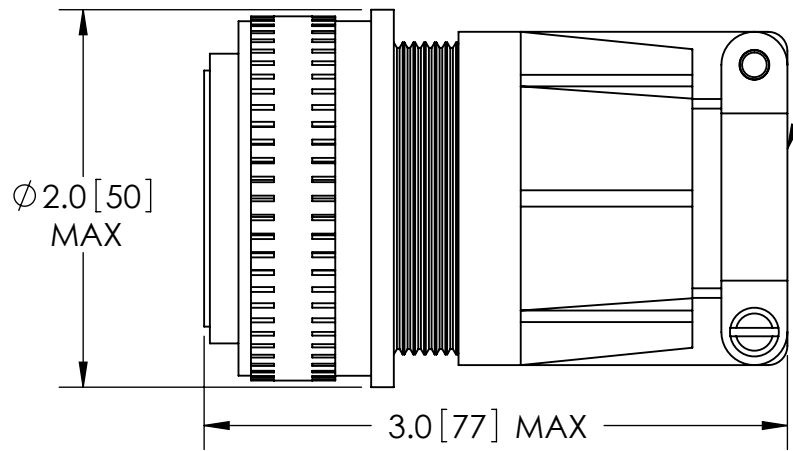


SILVER PLATED
SIZE 4 CRIMP CONTACTS

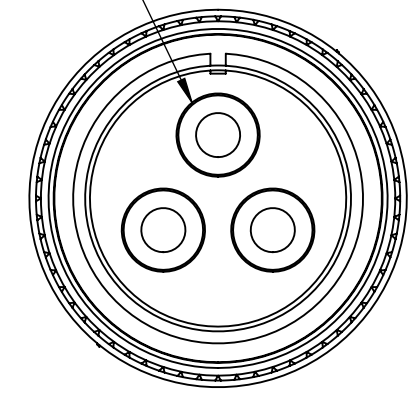

ACCEPTS 4 AWG WIRE
FOR CRIMP


RATINGS	
VOLTAGE:	1250 V DC
CURRENT @ ROOM TEMPERATURE:	120 AMPS
PRESSURE:	0 PSIG @ 20°C*
TEMPERATURE WITHOUT PLUG:	-25°C TO 205°C
TEMPERATURE WITH PLUG:	-25°C TO 125°C

*FOR INTERNAL PRESSURE 5 TO 100 PSIG AN OVERPRESSURE RING IS REQUIRED.

-AMPHENOL AMPHE-POWER ® SERIES STRAIGHT AIR SIDE PLUG INCLUDED.
FOR INSTALLATION INSTRUCTIONS REFER TO AMPHENOL ® PUBLICATION L-757.

WWW.SOLIDSEALING.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE:
THREE PIN CONNECTOR



REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]
A5	JF	09/13/2019	MPCLO282-11	

DRAWN	JS	6/19/2009
ENG APPR.	MH	07/01/2009

PART NO. **KT20682 REV. A**

SOLID SEALING TECHNOLOGY, INC.
SALES DWG NO. KT20682SL REV. A5

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.