



CABLE: 20 AWG SILVER  
PLATED COPPER WIRE  
WITH SILICONE INSULATION  
COLOR: BLUE

PLUG BODY: MOLDED  
SILICONE RUBBER

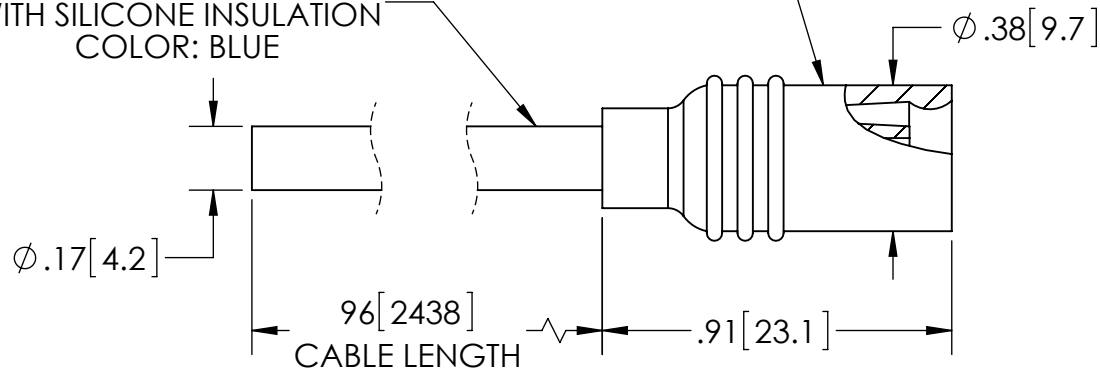

-AIR SIDE PLUG INCLUDED

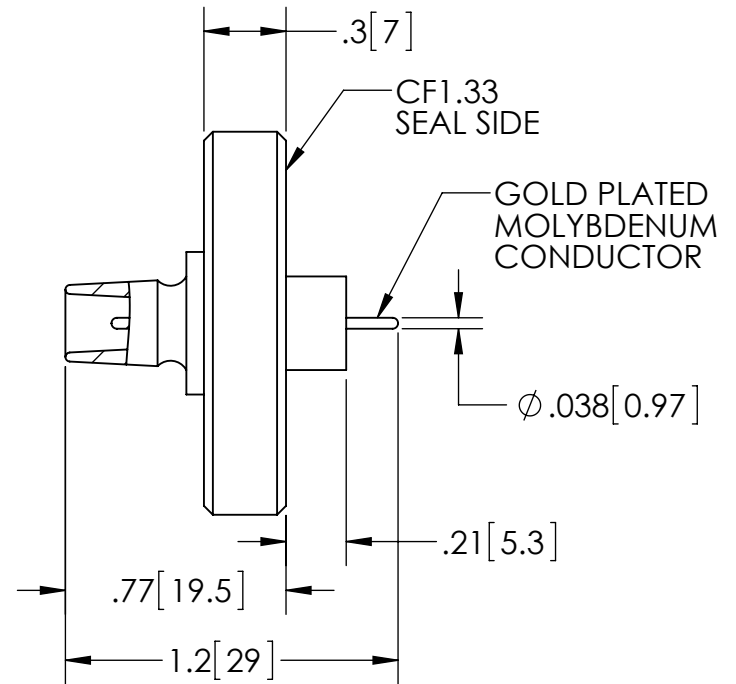

RATINGS

VOLTAGE:	15 KV DC
CURRENT:	7.5 AMPS
PRESSURE:	1100 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-55°C TO 125°C

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. KT21809SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

15KV CONNECTOR

PART NO. KT21809 REV. A

REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JS	11/27/2013
A1	JS	12/02/2013	FTMS0026-12		ENG APPR.	JS	12/02/2013

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**