


-AIR SIDE PLUG INCLUDED

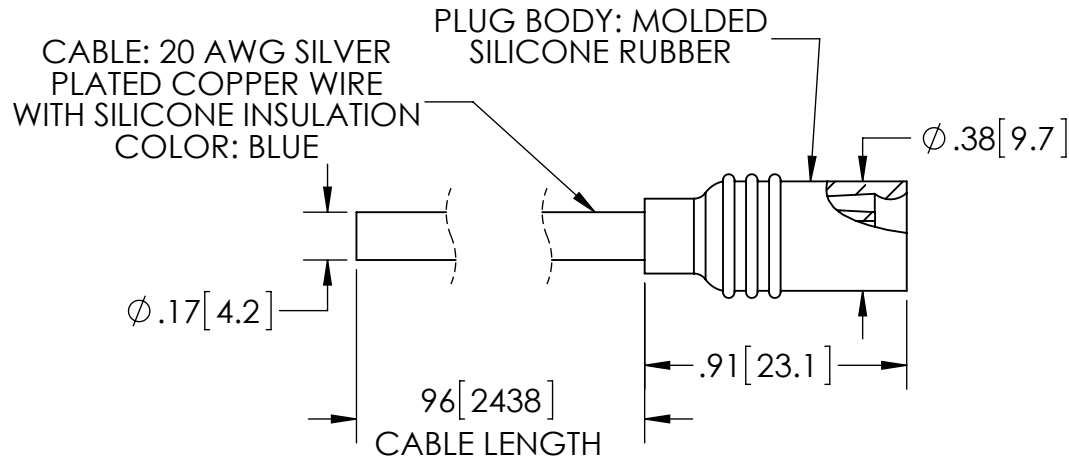

SCALE 3: 2

RATINGS	
VOLTAGE:	15 KV DC
CURRENT:	7.5 AMPS
PRESSURE:	1100 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-55°C TO 125°C

[WWW.SOLIDSEALING.COM](http://WWW.SOLIDSEALING.COM)




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. KT21811SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

15KV CONNECTOR

PART NO. KT21811 REV. A

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	12/02/2013
A1	JS	12/02/2013	MPMS0015-12		ENG APPR.	JS	12/02/2013

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**