


-AIR SIDE PLUG INCLUDED

CABLE: 24 AWG  
SILVER PLATED COPPER WIRE  
WITH SILICONE  
COATED F.E.P. INSULATION  
COLOR: WHITE

PLUG BODY: MOLDED  
SILICONE RUBBER

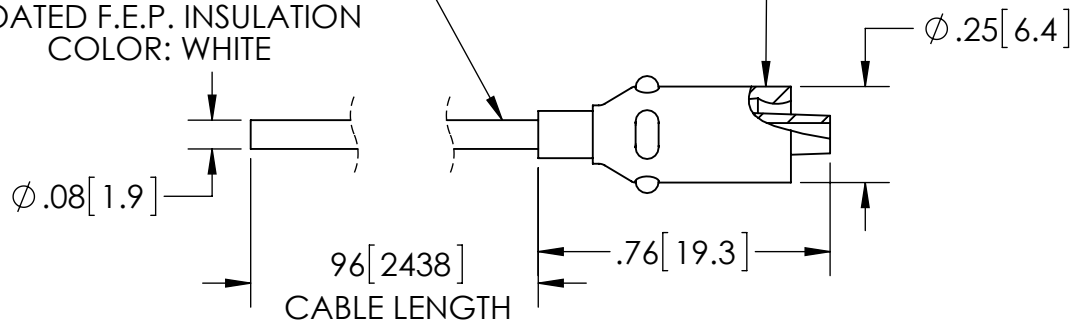

SCALE 2:1

| RATINGS                   |                  |
|---------------------------|------------------|
| VOLTAGE:                  | 12KV DC          |
| CURRENT:                  | 3 AMPS           |
| PRESSURE:                 | 1400 PSIG @ 20°C |
| TEMPERATURE WITHOUT PLUG: | -269°C TO 450°C  |
| TEMPERATURE WITH PLUG:    | -55°C TO 125°C   |

[WWW.SOLIDSEALING.COM](http://WWW.SOLIDSEALING.COM)




**SOLID SEALING TECHNOLOGY, INC.**

SALES DWG NO. KT21820SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

FOUR 12KV CONNECTORS

PART NO. KT21820 REV. A

| REV. | APP'D | DATE       | SCALE 1:1   | DIMENSIONS IN<br>INCHES [mm] | DRAWN     | JS | 12/13/2013 |
|------|-------|------------|-------------|------------------------------|-----------|----|------------|
| A1   | JS    | 12/13/2013 | MPMS0015-16 |                              | ENG APPR. | JS | 12/13/2013 |

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**