


-AIR SIDE PLUG INCLUDED

CABLE: 24 AWG  
SILVER PLATED COPPER WIRE  
WITH SILICONE  
COATED F.E.P. INSULATION  
COLOR: WHITE

PLUG BODY: MOLDED  
SILICONE RUBBER

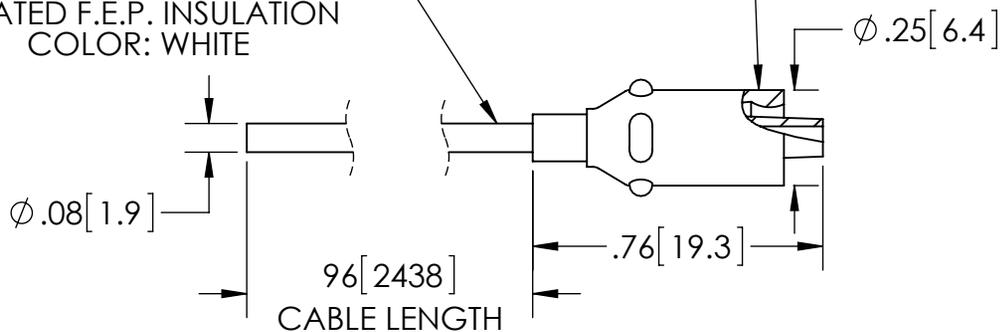

SCALE 2:1

RATINGS	
VOLTAGE:	12 KV DC
CURRENT:	3 AMPS
PRESSURE:	0 PSIG @ 20°C*
TEMPERATURE WITHOUT PLUG:	-25°C TO 205°C
TEMPERATURE WITH PLUG:	-25°C TO 125°C

\*FOR INTERNAL PRESSURE 5 TO 100 PSIG  
AN OVERPRESSURE RINGS IS REQUIRED.

[WWW.SOLIDSEALING.COM](http://WWW.SOLIDSEALING.COM)




**SOLID SEALING TECHNOLOGY, INC.**

SALES DWG NO. KT21823SL REV. A1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE  
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY  
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

THREE 12KV CONNECTORS

PART NO. KT21823 REV. A

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JS	12/13/2013
A1	JS	12/13/2013	MPMS0016-15		ENG APPR.	JS	12/13/2013

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**