




STRAIN RELIEF BUSHING INCLUDED
WITH PLUG -STRAIN RELIEF ID
4mm, 5mm, 7mm, 9.8mm 10.2mm

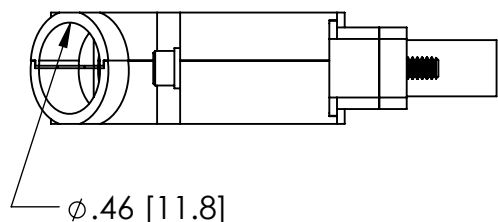

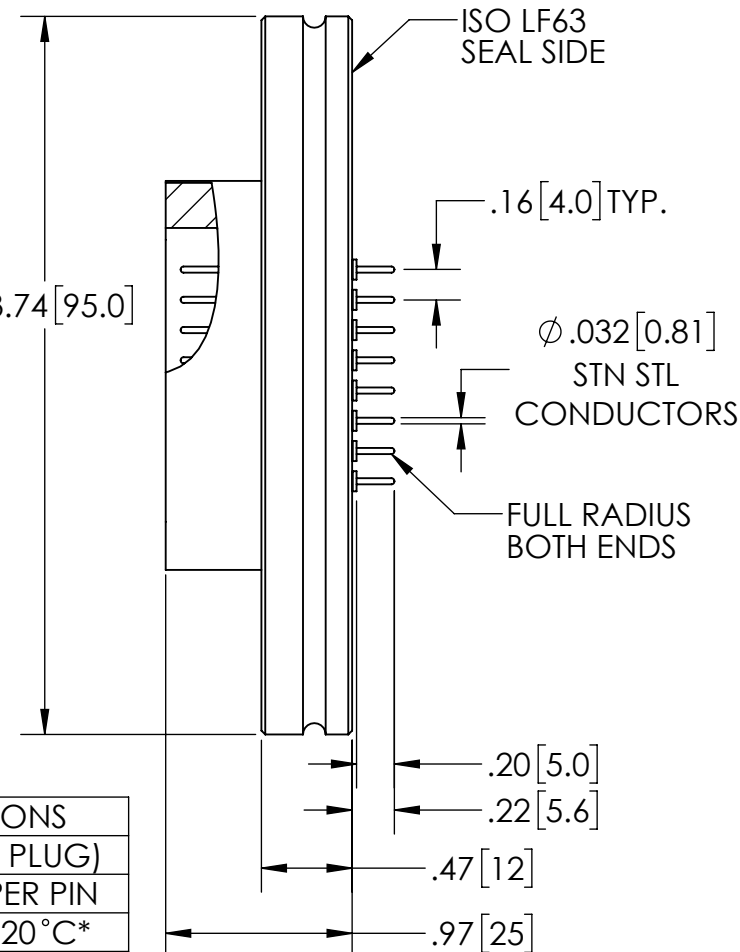

PART NO.	PLUG INCLUDED
KT35439	YES

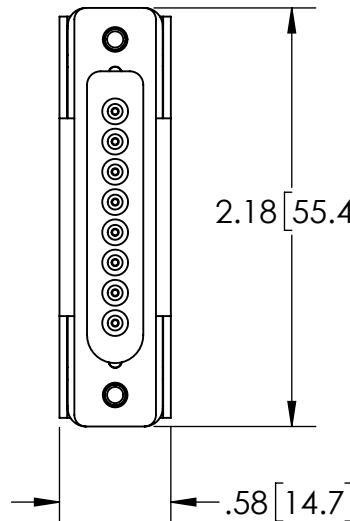

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	3KV (WITH PLUG)
CURRENT:	1.0 AMP PER PIN
PRESSURE:	0 PSIG @ 20°C*
TEMPERATURE WITHOUT PLUG:	-25°C TO 205°C
TEMPERATURE WITH PLUG:	-25°C TO 105°C

*FOR INTERNAL PRESSURE 5 TO 100 PSIG
AN OVERPRESSURE RING IS REQUIRED.

REFER TO INSTRUCTION SHEET "NS28193" FOR PLUG ASSEMBLY INSTRUCTIONS.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				<div>THIRD ANGLE PROJECTION</div> 		TITLE 8 PIN CONNECTOR IN ISO LF63			 <div>SOLID SEALING TECHNOLOGY</div>	
REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	ET	05/25/2018	PART NO. KT35439 REV. A	WWW.SOLIDSEALING.COM	
A2	JF	06/10/2021	MALF0004-11		ENG APPR.	JF	06/21/2018		SALES DWG NO. KT35439SL REV. A2	

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.