




STRAIN RELIEF BUSHING INCLUDED
WITH PLUG -STRAIN RELIEF ID
4mm, 5mm, 7mm, 9.8mm 10.2mm



| PART NO. | PLUG INCLUDED |
|----------|---------------|
| KT35439 | YES |

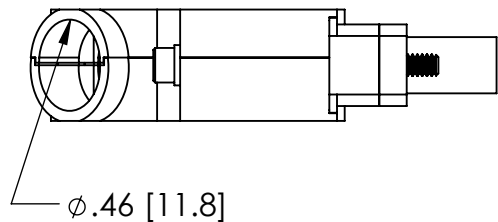

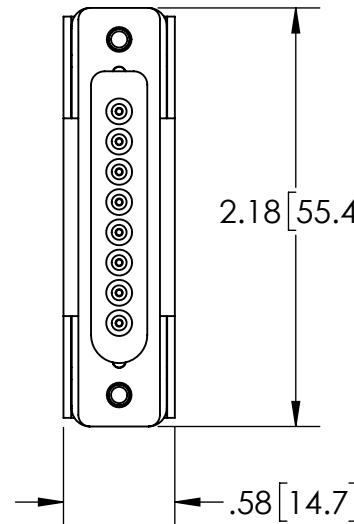

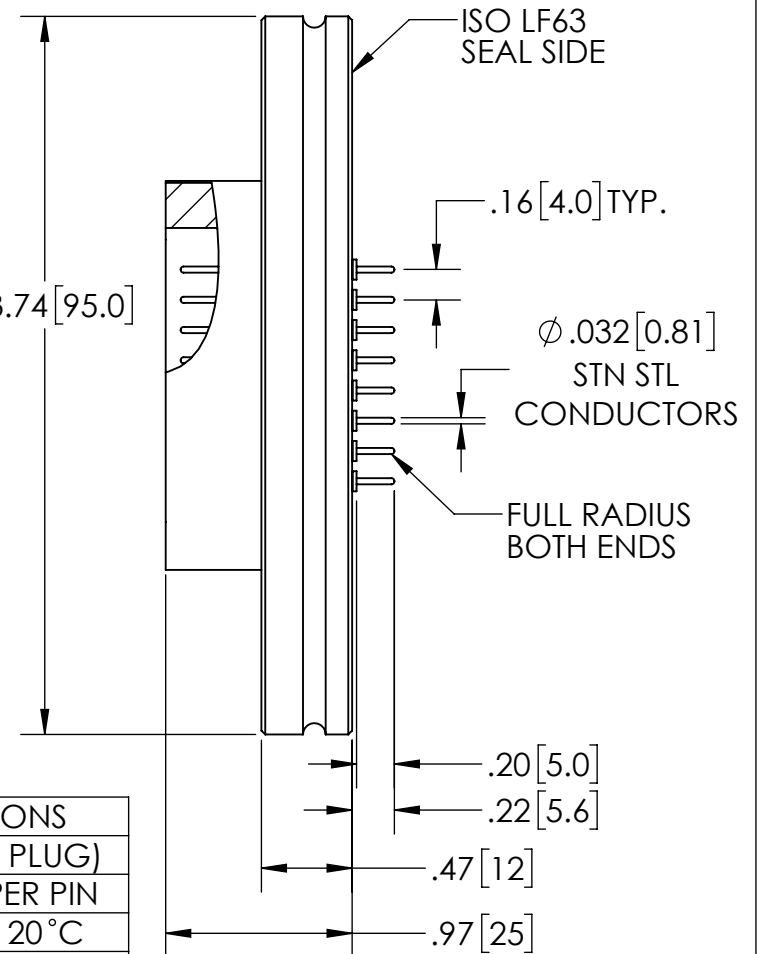$\phi 3.74 [95.0]$



| PERFORMANCE SPECIFICATIONS | |
|----------------------------|-----------------|
| VOLTAGE: | 3KV (WITH PLUG) |
| CURRENT: | 1.0 AMP PER PIN |
| PRESSURE: | 0 PSIG @ 20°C |
| TEMPERATURE WITHOUT PLUG: | -25°C TO 205°C |
| TEMPERATURE WITH PLUG: | -25°C TO 105°C |

REFER TO INSTRUCTION SHEET "NS28193" FOR PLUG ASSEMBLY INSTRUCTIONS.

| | | | | | | | | | | | |
|---|-------|------------|-------------|--|-----------|--|------------|-------------------------|--|--|--|
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED. | | | |  THIRD ANGLE PROJECTION | | TITLE 8 PIN CONNECTOR IN ISO LF63 | | |  SOLID SEALING TECHNOLOGY | | |
| REV. | APP'D | DATE | SCALE 1:1 | DIMENSIONS IN INCHES [mm] | DRAWN | ET | 05/25/2018 | PART NO. KT35439 REV. A | WWW.SOLIDSEALING.COM | | |
| A3 | MH | 12/11/2025 | MAIF0004-11 | | ENG APPR. | JF | 06/21/2018 | | SALES DWG NO. KT35439SL REV. A3 | | |

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.