


SCALE 1:1

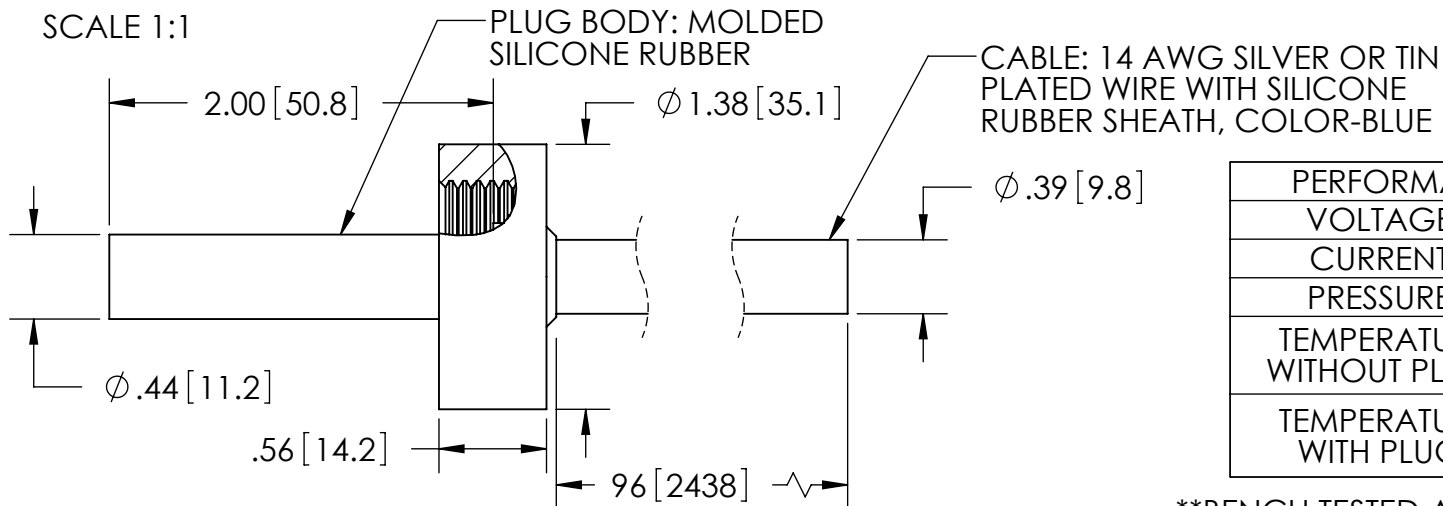

AIR SIDE PLUG/CABLE ASSEMBLY INCLUDED

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	50KV DC**
CURRENT:	10 AMPS
PRESSURE:	400 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-80°C TO 450°C*
TEMPERATURE WITH PLUG:	-55°C TO 125°C

\*\*BENCH TESTED AT ROOM TEMPERATURE

\*CALL SST TO CONFIRM LOWER TEMPERATURE USE

PROPRIETARY AND CONFIDENTIAL  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				 THIRD ANGLE PROJECTION		TITLE  50KV CONNECTOR				 <b>SOLID SEALING</b> TECHNOLOGY			
REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JF	11/20/2020	PART NO. KT39631 REV. B				WWW.SOLIDSEALING.COM	
B1	JF	05/17/2024	FTCL0130-22		ENG APPR.	JF	11/20/2020					SALES DWG NO. KT39631SL REV. B1	

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**