


SCALE 1:1

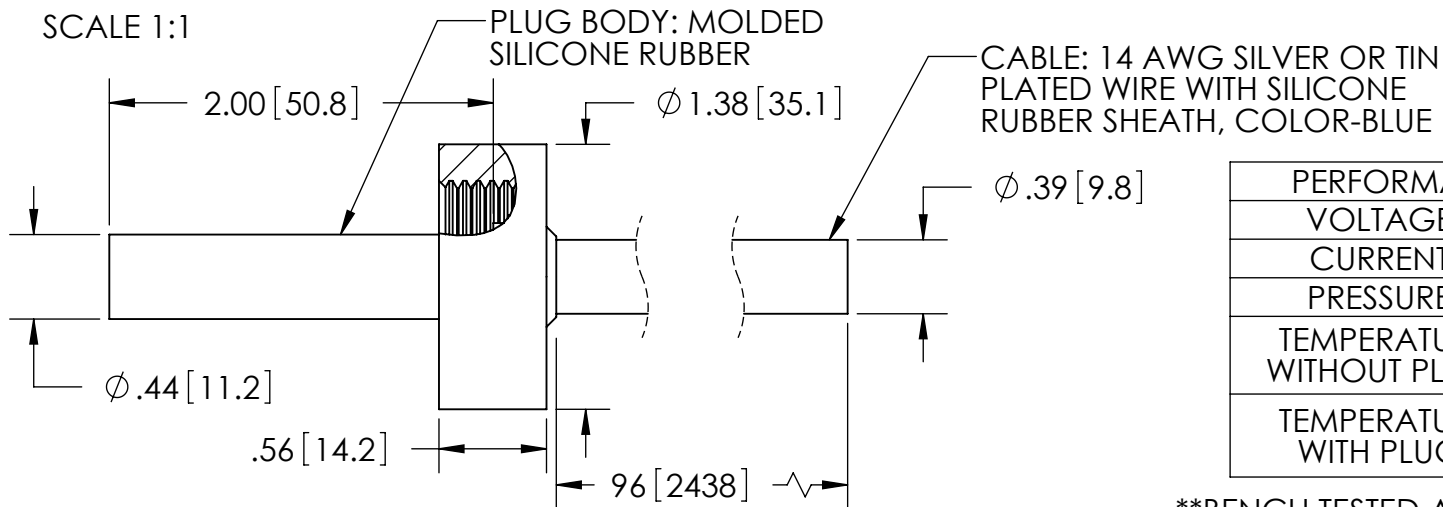


AIR SIDE PLUG/CABLE ASSEMBLY INCLUDED

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	50KV DC**
CURRENT:	10 AMPS
PRESSURE:	400 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-80°C TO 450°C*
TEMPERATURE WITH PLUG:	-55°C TO 125°C

\*\*BENCH TESTED AT ROOM TEMPERATURE  
\*CALL SST TO CONFIRM LOWER TEMPERATURE USE

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE

50KV CONNECTOR



REV.	APP'D	DATE	SCALE 3:2	DIMENSIONS IN INCHES [mm]	DRAWN	JF	11/20/2020
A1	JF	11/20/2020	FTCL0130-22		ENG APPR.	JF	11/20/2020

PART NO. KT39631 REV. A

WWW.SOLIDSEALING.COM

SALES DWG NO. KT39631SL REV. A1

**DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.**