
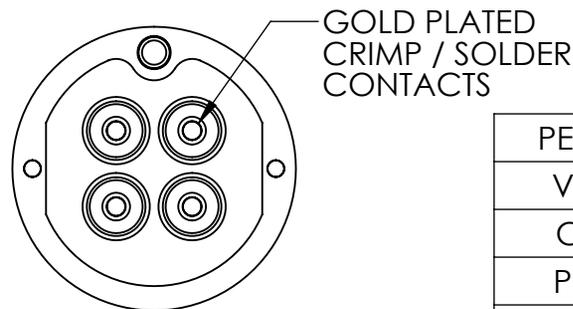
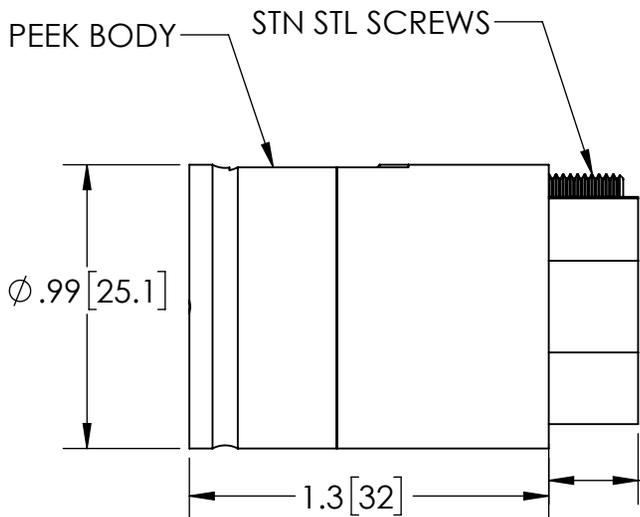
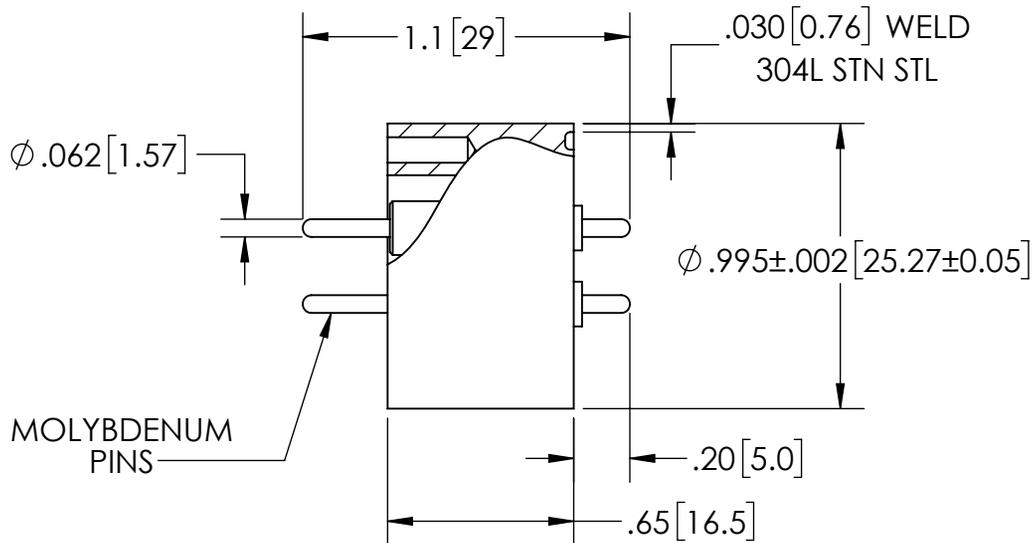


Ø .38 [9.5] #4-40 THREAD




PERFORMANCE SPECIFICATIONS	
VOLTAGE:	6.5 KV DC HIPOT
CURRENT:	13 AMPS
PRESSURE:	1250 PSIG @ 20°C
TEMPERATURE WITHOUT PLUG:	-80°C TO 450°C*
TEMPERATURE WITH PLUG:	-80°C TO 200°C*

PART No.	AIR SIDE PLUG INCLUDED
FA41856	NO
KT41856	YES

AIR SIDE PLUG

*CALL SST TO CONFIRM LOWER TEMPERATURE USE

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.



TITLE
 4 PIN CONNECTOR



REV.	APP'D	DATE	SCALE 1.5:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	1/29/2021
A1	JF	2/3/2021	FA31588-15		ENG APPR.	JF	2/3/2021

PART NO. KT41856 REV. A

WWW.SOLIDSEALING.COM
 SALES DWG NO. KT41856SL REV. A1

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.